

11566

Diag. Cht. No. 8863-2.

Form 504

U. S. COAST AND GEODETIC SURVEY

DEPARTMENT OF COMMERCE

DESCRIPTIVE REPORT

Type of Survey Shoreline (Photogrammetric)

Field No. Ph-34 Office No. T-11566

LOCALITY

State Alaska

General locality Andreanof Islands

Locality Chapel Cove - Adak Island

1954

CHIEF OF PARTY

S.B.Grenell, Chief of Field Party

L.W.Swanson, Div. of Photo. Wash., D.C.

LIBRARY & ARCHIVES

DATE June 24, 1958

11566

DATA RECORD

T-11566

Project No. (II): CS 218 Quadrangle Name (IV): Bay of Waterfalls - Chapel Cove
Ph-34(48)

Field Office (II): Ship EXPLORER

Chief of Party: S. B. Grenell

Photogrammetric Office (III): Washington, D. C.

Officer-in-Charge: L. W. Swanson

Instructions dated (II) (III):

Supplemental Instructions dated 19 March 1952

Copy filed in Division of
Photogrammetry (IV)

" " " 20 February 1953

Office files

" " " 23 December 1953

731-mkl

Compilation Instructions " 10 November 1954

Method of Compilation (III): Stereophotogrammetric - Kelsh

Manuscript Scale (III): 1:5,000

Stereoscopic Plotting Instrument Scale (III): 1:15,000

Scale Factor (III): 3.00

Date received in Washington Office (IV):

Date reported to Nautical Chart Branch (IV):

Applied to Chart No.

Date:

Date registered (IV):

5-19-58

Publication Scale (IV):

Publication date (IV):

Geographic Datum (III): NA 1927

Vertical Datum (III):

Mean sea level except as follows:

Elevations shown as (25) refer to mean high water

Elevations shown as (5) refer to sounding datum

i.e., mean low water or mean lower low water

Reference Station (III): CANE, 1954

Lat.: 51°-38'-34.668"
1071.4 (782.9) m.

Long.: 176-49-28.424
546.6 (607.2) m.

Adjusted-
Unadjusted

Plane Coordinates (IV):

State:

Zone:

Y=

X=

Roman numerals indicate whether the item is to be entered by (II) Field Party, (III) Photogrammetric Office, or (IV) Washington Office.

When entering names of personnel on this record give the surname and initials, not initials only.

DATA RECORD

Field Inspection by (II): None

July 1955 (see add. to Comp. Report) Date:

Planetable contouring by (II): --

Date:

Completion Surveys by (II): --

Date:

Mean High Water Location (III) (State date and method of location): Date of photography

Projection and Grids ruled by (IV): A. Riley

Date: February 1955

Projection and Grids checked by (IV): H. Wolfe

Date: February 1955

Control plotted by (III): B. Hale

Date: March 1955

Control checked by (III): B. J. Colner

Date: March 1955

Radial Plot or Stereoscopic

Date: March 1955

Control extension by (III): B. J. Colner

Planimetry B. Hale

Date: March 1955

Stereoscopic Instrument compilation (III):

Contours --

Date:

Manuscript delineated by (III): B. J. Colner

Date: March 1955

Photogrammetric Office Review by (III): R. J. French

Date: 31 March 1955

Elevations on Manuscript

Date:

checked by (II) (III): --

Camera (kind or source) (III): W Camera USC&GS Single-lens

Number	Date	Time	Scale	Stage of Tide
54W-2865	9/6/54	16:17	1:5,000	2.4 above MLLW
2866	"		Ratio from	"
2867	"	to	1/15,000	"
--				
2872	"			
2873	"			"
2874	"	16:26		

Tide (III)

Reference Station: Sweeper Cove, Adak Island, Alaska
Subordinate Station: * Same
Subordinate Station:

Diurnal		
Ratio of Ranges	Mean Range	Spring Range
		3.7
1.1		3.7

Washington Office Review by (IV):

Date:

Final Drafting by (IV):

Date:

Drafting verified for reproduction by (IV):

Date:

Proof Edit by (IV):

Date:

Land Area (Sq. Statute Miles) (III):

Shoreline (More than 200 meters to opposite shore) (III):

Shoreline (Less than 200 meters to opposite shore) (III):

Control Leveling - Miles (II):

Number of Triangulation Stations searched for (II): 2 Recovered: 2 Identified: 2

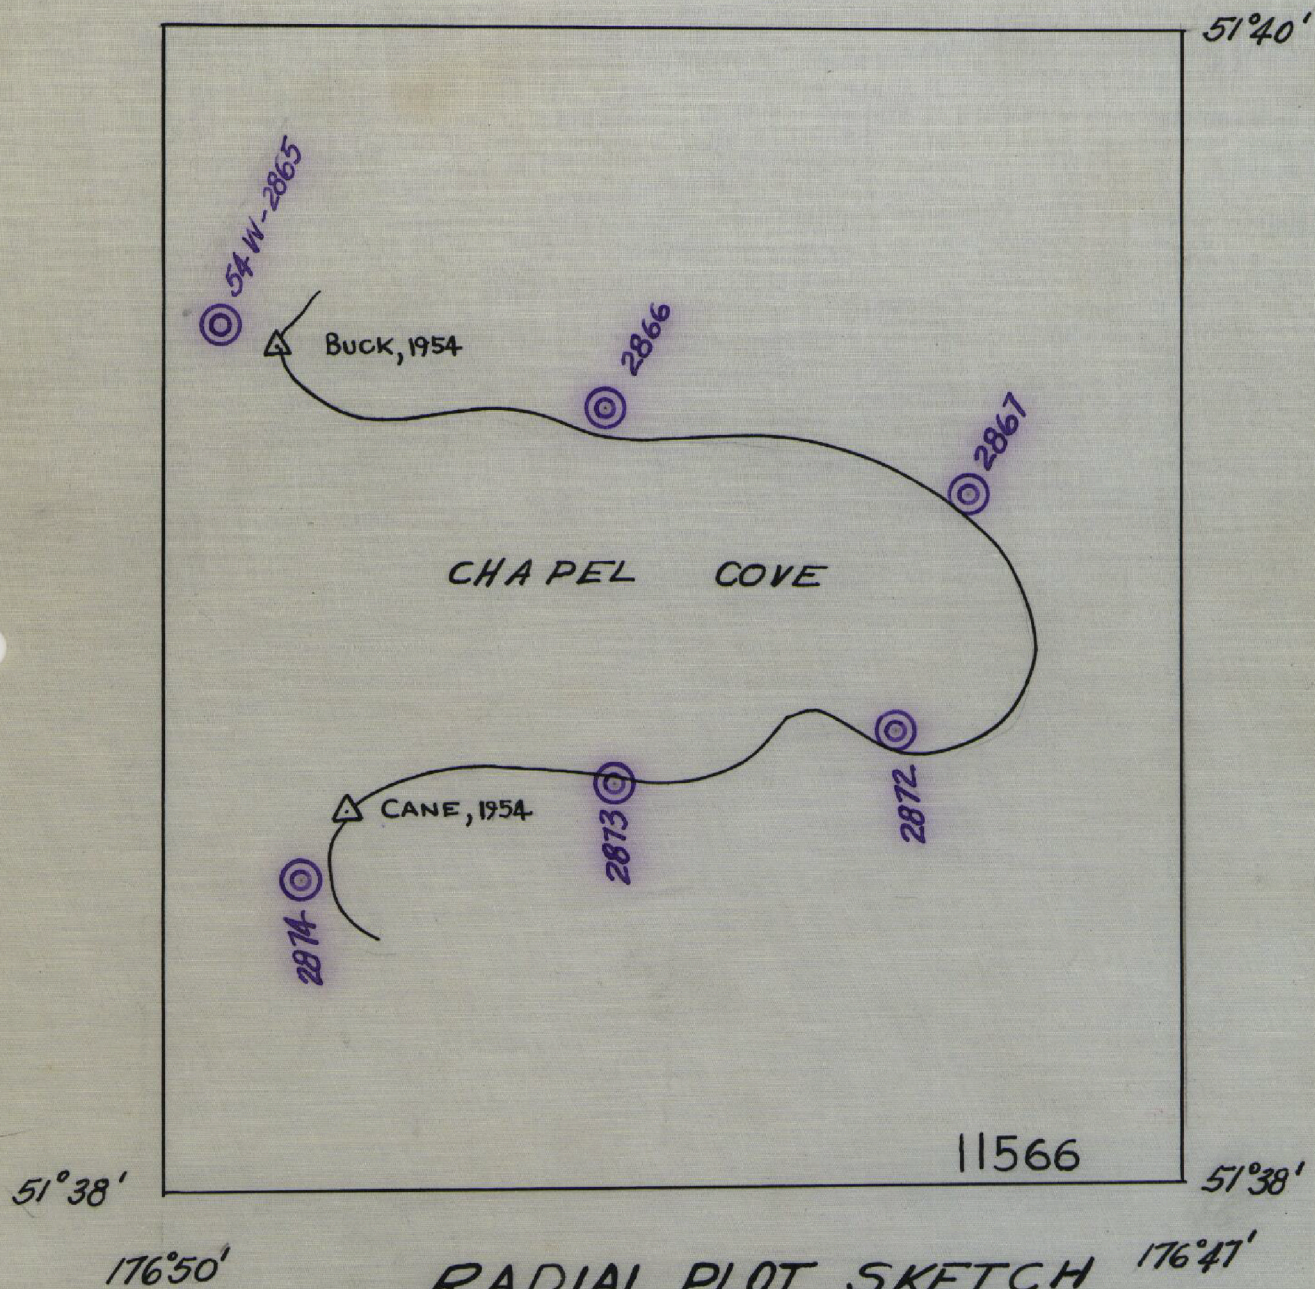
Number of BMs searched for (II): -- Recovered: Identified:

Number of Recoverable Photo Stations established (III): None

Number of Temporary Photo Hydro Stations established (III): None

Remarks:

*Bay of Waterfalls - 1^h 40'; and ratio of ranges 1.1



RADIAL PLOT SKETCH

Ph 34 Adak, Alaska

△ stations held

⊙ Photo centers

MAP T-11566	PROJECT NO.	SCALE OF MAP	SCALE FACTOR
	Ph-34	1:5,000	1.0

[illegible]

1 FT. - 3048006 METER

COMPUTED BY: L. C. Lande
DATE: February 1954
CHECKED BY: J. E. Hurdley
DATE: 12 January 1955

PHOTOGRAMMETRIC PLOT REPORT
T-11566

21. AREA COVERED

This report covers just one manuscript in Chapel Cove on the east side of the Bay of Waterfalls on Adak Island (T-11566).

22. METHOD

Stereo-photogrammetric templates were made with the Kelsh plotter after orienting the models properly to eliminate tilt as a factor in drawing the templates. The templates were laid down on the two horizontal control stations available to control the plot, and six manuscript positions of common detail which were located and transferred from the nine-lens 1:20,000 radial plot. The method did not provide what was considered a rigid plot, whereupon radials were drawn and templates were made in the conventional way from the principal point centers on the ratio prints. Both sets of templates were laid together and intersections were effected which insured a rigid plot. Azimuths and cross azimuths were strong enough to consider the head of the Bay strong where only the 1:20,000 scale points were available. The 1:20,000 scale points would not hold except to a closest tolerance of 0.5 mm. of map position for two out of the six used. This last assumes no criterion for the accuracy of the plot which is considered good.

23. ADEQUACY OF CONTROL

Control was inadequately placed to provide an absolute assurance of accurate position at the head of the cove. However, azimuths were good and the two control stations held well, which would indicate no serious error in the plot.

24. SUPPLEMENTAL DATA

None.

25. PHOTOGRAPHY

The diapositives were of good quality; and the ratio prints were of good detail considering a three-time enlargement. Shadows and displacements were the main obstacles to accurate detailing, but images were clear in most instances.

SKETCH AND FORM M-2388-12, CONTROL STATIONS

The attached sketch shows the placement of photographs and control, and the unadjusted field positions are listed on M-2388-12.

Approved:

Respectfully submitted:

Roscoe J. French

Roscoe J. French
Supervisory Cartographer

B. J. Colner
Cartographer

COMPILATION REPORT T-11566

31. DELINEATION

The Kelsh plotter was used to detail the approximate MHWL in Chapel Cove without benefit of any field inspection of the shoreline. Due to the fact that ratio prints were available a visual comparison was made, and graphic methods were used to correct the shoreline where shadows and displacements made it impractical for the Kelsh plotter to delineate properly. Rock data and reference to the vertical datum is lacking, and an effort has been made by office interpretation to indicate rocks awash and those that bare at MHW.

32. CONTROL

Only two control stations were field identified and are on the headlands of the cove. An additional station at the head of the cove would have insured the horizontal accuracy on the eastern end of the sheet. The two stations held were also used to control a 1:20,000-scale nine-lens plot in the same general area on T-11330. (See radial plot report attached.) The control was field identified on 1:15,000-scale photography and transferred to the 1:5,000-scale ratio prints prior to identification on the diapositives. All points held to in the plotter were first identified on the ratio prints and had a manuscript position established by the plot.

33. SUPPLEMENTAL DATA

None.

34. CONTOURS AND DRAINAGE

No interior drainage is shown.

35. SHORELINE AND ALONGSHORE DETAILS

All features are shown as determined by office interpretation only, and no field inspection was furnished for delineation at this time.

36. OFFSHORE DETAILS

Office interpretation only.

37. LANDMARKS AND AIDS

None.

38. CONTROL FOR FUTURE SURVEYS

The office ratio prints have shoreline pass points at short and regular intervals which have manuscript positions established by the radial plot. These pass points can be used by the hydrographic party in using Photogrammetry Instructions No. 45 for locating additional photo-hydro stations.

No other supplementary control has been located.

39. JUNCTIONS

Although the manuscript joins T-11330 on three sides, no junction was made with it due to the scheduling of operations, and for the reason that position and delineation on T-11330 are of a "preliminary" classification.

40. HORIZONTAL AND VERTICAL ACCURACY

Vertical accuracy does not apply.

A final appraisal of the horizontal accuracy is dependent on further field verification of the manuscript at the head of the cove where the map position is considered least accurate. However, it is believed from what information is available that there are no areas in excess of 0.5 mm. of true position.

41 through 45. Not applicable.

46. COMPARISON WITH EXISTING MAPS

None.

47. COMPARISON WITH NAUTICAL CHARTS

9121 1:10,000 52-8/25

Items to be carried forward - none.

48. GEOGRAPHIC NAMES


Shown on form for Geographic Names which accompanies this report.

Approved:



Roscoe J. French
Supervisory Cartographer

Respectfully submitted:



B. J. Colner
Cartographer

ADDITION TO COMPILATION REPORT T-11566

31. DELINEATION

Considerable changes were made in the delineation of shoreline and offshore features by using the July 1955 field-inspected photographs listed below:

<u>Photo</u>	<u>Date</u>
54W-2865	9-6-54
" 66	"
" 67	"
" 2872	"
" 73	"
" 74	"

T-11566, with the application of 1955 field inspected data and hydro-signal location completed, is a final advance shoreline manuscript.

32. CONTROL

The 1955 field identification of triangulation station Buck, 1954 verified the radial plot and the 1954 field identification of same. Triangulation station Cane, 1954 was pricked direct in 1955 and its radial plot position falls on the plotted geographic position.

33. None

34. None

35. SHORELINE AND ALONGSHORE DETAILS

See addition to Paragraph 31.

36. OFFSHORE DETAIL

Covered by addition to Paragraph 31.

37. LANDMARKS AND AIDS

None.

38. None

39. None

40. HORIZONTAL AND VERTICAL ACCURACY

None.

41-45. Not applicable.

46. None.

47. None.

48. None.

Respectfully submitted:

C. O. DeMarr

C. O. DeMarr
Cartographer

Approved:

K. N. Maki 10/55
K. N. Maki
Supervisory Cartographer

49. NOTES FOR THE HYDROGRAPHER

The 1955 hydrographic party identified the following photo-hydro signal sites to be located by the radial plot for final smooth sheet plotting:

Awe	Fog	Kal	OBA	Ten	Vue
Cue	Gar	LAK	Pas	Yak	
Did	Hit	Nat	Ret	Zoo	
Eat	Ish	Moo	Sap	Urn	

The above stations were located graphically by three radial line cuts, and the transfer from field pricking to office photographs was good.

Station Pas on the field photograph was called Ret on Boat Sheet EXO 5155.

Station Pas on Boat Sheet EXO 5155 was not named on the field photograph. However, a prick hole was found in the approximate area and was assumed to be same. This station was located graphically and is not named on the manuscript. Its approximate location is $\phi = 51^{\circ} 38' 44''$
 $\lambda = 176^{\circ} 48' 45''$

The following photo-hydro stations are shown on Boat Sheet EXO 5155; however, they are not field identified and could not be located graphically:

Bev
Won
Even

GEOGRAPHIC NAMES

Survey No. T-11566

GEOGRAPHIC NAMES											
Survey No. T-11566											
Name on Survey											
	A	B	C	D	E	F	G	H	K		
<u>BAY OF WATERFALLS</u>											1
<u>CHAPEL ROADS</u>											2
<u>CHAPEL COVE</u>											3
<u>MIDDLE PT.</u>											4
^U MCCULLOCH ROCK <i>is</i>			(submerged see nautical chart 1912: name OK with correction)								5
<u>PULPIT RKS.</u>											6
<u>RED ROCK</u>											7
<u>SOUTH RKS.</u>											8
<u>WEDGE CAPE</u>											9
<u>Adak Island</u>											10
<u>Andreanof Islands (title)</u>					Names approved 8-16-56, L. Heck						11
											12
											13
											14
											15
											16
											17
											18
											19
											20
											21
											22
											23
											24
											25
											26
											27
											28
											29
											30
											31
											32
											33
											34
											35
											36
											37
											38
											39
											40
											41
											42
											43
											44
											45
											46
											47
											48
											49
											50
											51
											52
											53
											54
											55
											56
											57
											58
											59
											60
											61
											62
											63
											64
											65
											66
											67
											68
											69
											70
											71
											72
											73
											74
											75
											76
											77
											78
											79
											80
											81
											82
											83
											84
											85
											86
											87
											88
											89
											90
											91
											92
											93
											94
											95
											96
											97
											98
											99
											100

Review Report
Shoreline Survey T-11566
22 August 1956

62. Comparison with Registered Topographic Surveys:

T-6941 (U.S.N.) 1933 1:40000
T-6942 (U.S.N.) 1933 rec. - no scale

These surveys are to be superseded by T-11566 for nautical charting.

63. Comparison with Maps of Other Agencies:

Adak Island (No. 7 and 8 of 10), AMS, 1:25000, 1943

Difference in datum (local datum AMS Maps) discloses considerable differences in shoreline and offshore features. Detailing of T-11566 (1:5000) agrees with Topographic Map Manuscript T-11330 (1:20000), which is to be published by AMS at scale 1:25000 and will replace the above-mentioned 1943 editions.

64. Comparison with Contemporary Hydrographic Surveys:

H-8238 1:20000 1955

The subject photogrammetric survey was used in compiling inset at scale of 1:5000 of hydrographic survey smooth sheet H-8238, 1:20000, 1955. The two surveys agree in all common detailing.

65. Comparison with Nautical Charts:

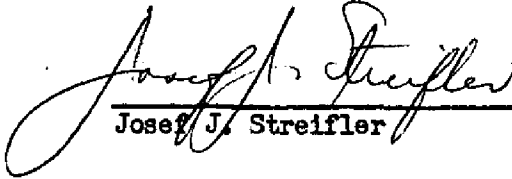
9121	1:10000	1947, corrected to 52-8/25
9193	1:120000	1953, corrected to 54-7/5

Differences in shoreline and alongshore features exist. However, results of subject photogrammetric survey will be used for the new printing of Nautical Chart 9121.


66. Adequacy of Results and Future Surveys:

This survey is adequate for Bureau requirements. No significant deficiencies in accuracy and adequacy were indicated.


Reviewed by:


Josef J. Streifler

APPROVED:


Chief, Review and Drafting Section
Photogrammetry Division


Chief, Nautical Chart Branch
Charts Division


Chief, Photogrammetry Division


Chief, Coastal Surveys Division

Summary to accompany Shoreline Survey T-11566

Shoreline Survey T-11566 was accomplished as part of project 6034. It is the only sheet in this vicinity at scale of 1:5000 covering Chapel Roads and Chapel Cove in the Bay of Waterfalls (SW portion of Adak Island) of the Aleutian Islands.

The survey was accomplished to furnish shoreline and alongshore details for 1:5000 Inset of Hydrographic Survey H-8238.

Diapositives from "W" Camera, single-lens photography of 1954 were used for detailing with the Kelsh Plotter, without benefit of field inspection.

Results of later field work (July 1955), consisting of identification of control and inspection of shoreline and alongshore features, were applied to the map manuscript in October 1955. Detailing of corrected map manuscript was applied to the smooth sheet of Hydrographic Survey H-8238 (1955).

A cloth-backed lithographic print of manuscript scale and the descriptive report will be registered and filed in the Bureau Archives.