#### NOAA FORM 76-35

U.S. DEPARTMENT OF COMMERCE
NATIONAL OCEANIC AND ATMOSPHERIC ADMINISTRATION
NATIONAL OCEAN SURVEY

## **DESCRIPTIVE REPORT**

Type of SurveyShoreline
Job No. PH-6013 Map No. T-12028
Classification No. Final Map Edition No. 1
LOCALITY
StateAlaska
Cook Inlet
General Locality Kalgin Island to Anchorage
Locality Gray Cliff, NE. of
1966 TO 1977
REGISTRY IN ARCHIVES
DATE

☆ U.S. GOVERNMENT PRINTING OFFICE: 1974-762-901

NOAA FORM 76-36A U. S. DEPARTMENT OF COMMERCE (3-72) NATIONAL OCEANIC AND ATMOSPHERIC ADMIN.	TYPE OF SURVEY	SURVEY IR- T-12028
	☑ ORIGINAL	MAP EDITION NO. (1)
DESCRIPTIVE REPORT - DATA RECORD	RESURVEY	Map CLASS Final Map
	REVISED	лов <b>РН-</b> _6013
PHOTOGRAMMETRIC OFFICE	LAST PRECEED	ING MAP EDITION
Coastal Mapping Division	TYPE OF SURVEY	JOB PH-
Atlantic Marine Center, Norfolk, VA	ORIGINAL	MAP CLASS
OFFICER-IN-CHARGE	RESURVEY	SURVEY DATES:
Jeffrey G. Carlen, Cdr.	REVISED	19TO 19
L INSTRUCTIONS DATED	<u> </u>	
1. OFFICE	2.	FIELD
Aerotriangulation 9/15/66 8/13/73 Compilation, Supplement 3 4/26/67	Field Supplement l	6/6/66 8/08/6 3/30/7
II. DATUMS		<del></del>
11. UNIONI	OTHER (Specify)	
1. HORIZONTAL: X 1927 NORTH AMERICAN		
	OTHER (Specify)	
3. MAP PROJECTION	4.	GRID(S)
	STATE	ZONE
Polyconic	Alaska	4
1:20,000	STATE	ZONE
III. HISTORY OF OFFICE OPERATIONS		
OPERATIONS	NAME	DATE
1. AEROTRIANGULATION BY	P. Hawkins	4/67
METHOD: Stereoplanigraph LANDMARKS AND AIDS BY		
2. CONTROL AND BRIDGE POINTS PLOTTED BY	C. Bishop	5/67
METHOD: Manual CHECKED BY	A. Shands	5/67
3. STEREOSCOPIC INSTRUMENT PLANIMETRY BY COMPILATION CHECKED BY	A. Shands	5/67
COMPILATION CHECKED BY INSTRUMENT: Kelsh Plotter CONTOURS BY	R. Smith NA	5/67
SCALE: 1:20,000 CHECKED BY	NA NA	<del></del>
4. MANUSCRIPT DELINEATION PLANIMETRY BY	L. Graves	6/67
CHECKED BY	R. Pate	6/67
METHOO: Smoothdrafted CONTOURS BY	NA	
WELHOO: 2000CHGIALFEG	NA	
SCALE: 1:20,000 HYDRO SUPPORT DATA BY	L. Graves	6/67
CHECKED BY	R. Pate	6/67
5. OFFICE INSPECTION PRIOR TO FIELD EDIT BY	R. Pate	6/67
6. APPLICATION OF FIELD EDIT DATA	J. Roderick	1/78 1/78
7. COMPILATION SECTION REVIEW BY	F. Margiotta F. Margiotta	1/78
8. FINAL REVIEW BY	J. Byrd/C. Bloc	
9. DATA FORWARDED TO PHOTOGRAMMETRIC BRANCH BY	J. Byrd	9/86
10. DATA EXAMINED IN PHOTOGRAMMETRIC BRANCH BY	P. Demprey	Oct. 1986
11. MAP REGISTERED - COASTAL SURVEY SECTION / BY	E. L. DAUGHERTY	Dec 186

NOAA FORM 76-36B (3-72)			N	ATIONAL OCE		ATMOSPHER	MENT OF COMMER RIC ADMINISTRAT
	CO	T-120 WPILATIO		RCES		NATIO	NAL OCEAN SURV
. COMPILATION PHOTOGRAPHY							
CAMERA(S)	<del></del>	TYPE	S OF PH	OTOGRAPHY			
Wild RC-8"L"		] '''	TYPES OF PHOTOGRAPHY LEGEND			TIME REFERENCE	
TIDE STAGE REFERENCE	<del>-</del> -	(C) CO	LOR		ZONE		~
PREDICTED TIDES TREFERENCE STATION RECORDS		X (P) PA	NCHROM	ATIC	MERID	Alaska	T)STANDA
TIDE CONTROLLED PHOTOGRAPH	IY	(I) IN F	RARED		MERIO	150th	
NUMBER AND TYPE	DATE	TIMI	£	SCALE			OF TIDE
66L6715 & 66L6716	8/14/66	09:2	5	1:40,000	)   (	).2 ft.	above MLLW
REMARKS	<del></del>	<u> </u>					
.  3. SOURCE OF WEAN LOW WATER OF	MFAN I OWED I	OW.WATER	I INF				·
The mean lower low wa at 0.1 ft. above MLLW	ter line wa •	s compi	led fi	rom the ab	ove lis	teď pho	tography
					····		
, CONTEMPORARY HYDROGRAPHIC	SURVEYS (List	only those s	urveys th	at are sources !	or photogra	nmetric surv	ey information.)
SURVEY NUMBER DATE(S)	SURVEY CO	PY UŞED	SURVE	Y NUMBER	DATE(S)	su	RVEY COPY USEC
. FINAL JUNCTIONS							
NORTH EAS			SOUTH			WEST	
No Survey	T-12029		<u> </u>	T-12042		No	Survey
REMARKS							

· ----

NDAA FORM 76–36C 3–72)	T-12028 History of Field		IG AND ATMOSPHER	ENT OF COMMER IC ADMINISTRATI IAL OCEAN SURV
I. X FIELD INSPECTION C	PERATION   FIEL	D EDIT OPERATION		
	OPERATION	N A	AME	DATE
1. CHIEF OF FIELD PARTY				104
	RECOVERED BY	A. Wardw None	ell	1961
2. HORIZONTAL CONTROL	ESTABLISHED BY	None		
	PRE-MARKED OR IDENTIFIED BY	None		
	RECOVERED BY	NA	· · ·	
. VERTICAL CONTROL	ESTABLISHED BY	NA		
	PRE-MARKED OR IDENTIFIED BY	NA		
	RECOVERED (Triangulation Stations) BY	None		
4. LANDMARKS AND	LOCATED (Field Methods) BY	None		
AIDS TO NAVIGATION	LDENTIFIED BY	None		
	TYPE OF INVESTIGATION			
. GEOGRAPHIC NAMES	COMPLETE BY			1
INVESTIGATION	SPECIFIC NAMES ONLY			
	NO INVESTIGATION			
. PHOTO INSPECTION	CLARIFICATION OF DETAILS BY	None		
. BOUNDARIES AND LIMIT	S SURVEYED OR IDENTIFIED BY	NA		
I. SOURCE DATA		···	·	
None	IDENTIFIED	2. VERTICAL CONT	TROL IDENTIFIED	
PHOTO NUMBER	STATION: NAME	PHOTO NUMBER	STATION DE	SIGNATION .
3. PHOTO NUMBERS (Clariti	, icetion of details)		, , , , , , , , , , , , , , , , , , ,	
4. LANDMARKS AND AIDS T	O NAVIGATION IDENTIFIED	<u> </u>	<u></u>	
None		· · · · · · · · · · · · · · · · · · ·		
PHOTO NUMBER	OBJECT NAME	PHOTO NUMBER	OBJECT	NAME
5. GEOGRAPHIC NAMES:	REPORT NONE	6. BOUNDARY AND	LIMITS: TREPO	RT X NONE
7. SUPPLEMENTAL MAPS A None				
	(Sketch books, etc. DO NOT list date submit	ted to the Geodesy Div.	ision)	
None			•	

NOAA FORM 76-360				
(3-72)	•	NATIONAL OCEA	NIC AND ATMOSPHERIC	
	T-120 <b>28</b>		NATIONA	L OCEAN SURVEY
·	HISTORY OF FIELD	DPERATIONS		
I. X EIEI O INCO	Premarking Field	EDIT OPERATION		
	OPERATION		NAME	DATE
I. CHIEF OF FIEL	D PARTY	R. B. Melb	·V	6/66
	RECOVERED BY	R. B. Melb		6/66
2. HORIZONTAL C	ONTROL ESTABLISHED BY	None	<u> </u>	
	PRE-MARKED OR IDENTIFIED BY	R. B. Melb	У	6/66
	RECOVERED BY	NA		
3. VERTICAL CON	TROL ESTABLISHED BY	NA		
	PRE-MARKED OR IDENTIFIED BY	NA		
	RECOVERED (Triangulation Stations) BY	None		
4. LANDMARKS AT AIDS TO NAVIG		None		<u> </u>
A103 10 HAVIO	IDENTIFIED BY	None		
	TYPE OF INVESTIGATION			
5, GEOGRAPHIC N INVESTIGATION	BY			1
	T DI COLLIC MANIES ONE!			
	NO INVESTIGATION			<del>                                     </del>
6. PHOTO INSPEC		None		
7. BOUNDARIES A	ND LIMITS SURVEYED OR IDENTIFIED BY	NA		L
II. SOURCE DATA	ONTROL IDENTIFIED	2. VERTICAL COL	NTROL IDENTIFIED	
	SWINGE IDENTIFIED		THOS ISSUED	
None	· · · · · · · · · · · · · · · · · · ·	NA NA		<del></del>
PHOTO NUMBER	STATION NAME	PHOTO NUMBER	STATION DES	IGNATION
4676810	CDAY CITED 3000			
66L6549	GRAY CLIFF, 1909			
	·			
		·		
!				
3. PHOTO NUMBE	RS (Clarification of details)	<u> </u>		
None				
4. LANDMARKS A	ND AIDS TO NAVIGATION IDENTIFIED			
None				
PHOTO NUMBER	OBJECT NAME	PHOTO NUMBER	OBJECT	NAME

7. SUPPLEMENTAL MAPS AND PLANS

None

8. OTHER FIELD RECORDS (Sketch books, etc. DO NOT list data submitted to the Geodesy Division)

REPORT

□X) NONE

6. BOUNDARY AND LIMITS:

1 Form 152

5. GEOGRAPHIC NAMES:

REPORT

X NONE

NDAA FORM 76-36C (3-72)	T-12028 History of Field	:	NIC AND ATMOS	PARTMENT OF COMMERCE PHERIC ADMINISTRATION INTO SURVEY		
I. TIELD INSPECTION OPERATION						
	OPERATION		NAME	DATE		
1. CHIEF OF FIELD PARTY			1.	1077		
	RECOVERED BY	B. Wil None	llams	June 1977		
2. HORIZONTAL CONTROL	ESTABLISHED BY	None	<del></del>			
	PRE-MARKED OR IDENTIFIED BY	None				
	RECOVERED BY	NA				
3. VERTICAL CONTROL	ESTABLISHED BY	NA				
	PRE-MARKED OR IDENTIFIED BY	NA				
	RECOVERED (Triangulation Stations) BY	None				
4. LANDMARKS AND	LOCATED (Field Methods) BY	None				
AIDS TO NAVIGATION	IDENTIFIED BY	None				
	TYPE OF INVESTIGATION		<del></del>			
5. GEOGRAPHIC NAMES	COMPLETE BY					
INVESTIGATION	SPECIFIC NAMES ONLY					
	NO INVESTIGATION		· <del>-</del>			
6. PHOTO INSPECTION	CLARIFICATION OF DETAILS BY	N. Mil	lett	June 1977		
7. BOUNDARIES AND LIMITS	SURVEYED OR IDENTIFIED BY	NA_	<del></del>			
II. SOURCE DATA  1. HORIZONTAL CONTROL I	IDENTIFIED	2. VERTICAL CO	NTPOL IDENTIF	1ED		
•	DENTIFIED	NA	NIKOL IDENIII	160		
None None PHOTO NUMBER	STATION NAME	PHOTO NUMBER	T	ON DESIGNATION		
3. PHOTO NUMBERS (Claritic	cation of details)	· · · · · · · · · · · · · · · · · · ·				
. 66L6715-6				<u> </u>		
4. LANDMARKS AND AIDS TO	D NAVIGATION IDENTIFIED					
None		<del></del>				
PHOTO NUMBER	OBJECT NAME	PHOTO NUMBER	O E	BJECT NAME		
5. GEOGRAPHIC NAMES:	REPORT NONE	6. BOUNDARY AN	D LIMITS:	REPORT X NONE		
7. SUPPLEMENTAL MAPS AN		<u> </u>				
8. OTHER FIELD RECORDS	(Sketch books, etc. DO NOT list data submit	ted to the Geodesv D	ivision)			
1-Field e	edit report ield edit ozalid	to into occupacy D				

· -


NOAA FORM 76-36D

(3-72)

U. S. DEPARTMENT OF COMMERCE NATIONAL OCEANIC AND ATMOSPHERIC ADMINISTRATION

T-12028

	·	RECO	ORD OF SURVE	A nze			
I. MANUSC	RIPT COPIES					<u></u> -	
	CON	PILATION STAG		DATE MANUSCRI	PT FORWARDED		
	DATA COMPILED	DATE	RE	MARKS	MARINE CHARTS	HYDRO SUPPORT	
	ilation complete, ing field edit.	6/67	Class III	manuscript	None	5/15/73	
	d edit applied. ilation complete.	1/78	Class I ma	anuscript	2/1/78	2/1/78	
Fina	1 Review	5/86	Final Map		<u> </u>		
	ARKS AND AIDS TO NAVIGA		one				
I. REP	ORTS TO MARINE CHART DIV		L DATA BRANCH	<del></del>	<del></del>		
NUMBER	CHART LETTER Number assigned	DATE FORWARDED		RE	MARKS _		
			<del> </del>				
	·						
		· · · · · · · · · · · · · · · · · · ·			···		
	·						
	REPORT TO MARINE CHART						
3. REPORT TO AERONAUTICAL CHART DIVISION, AERONAUTICAL DATA SECTION. DATE FORWARDED:							
2. 🗀	11. FEDERAL RECORDS CENTER DATA  1. X BRIDGING PHOTOGRAPHS; X DUPLICATE BRIDGING REPORT; X COMPUTER READOUTS.  2. CONTROL STATION IDENTIFICATION CARDS; FORM NOS 567 SUBMITTED BY FIELD PARTIES.  3. X SOURCE DATA (except for Geographic Names Report) AS LISTED IN SECTION II, NOAA FORM 76-36C.  ACCOUNT FOR EXCEPTIONS:						
4.	DATA TO FEDERAL RECOR	DS CENTER. DA	TE FORWARDED:			_	
	EY EDITIONS (This section s						
111 00111	SURVEY NUMBER	лов иймві			TYPE OF SURVEY		
SECOND	TP	(2) PH		∐ ⊧	EVISED RES	SURVEY	
EDITION	DATE OF PHOTOGRAPH	Y DATEOFF	FIELD EDIT		MAP CLASS	FINAL	
<del></del> -	SURVEY NUMBER	ЈОВ МИМВІ	ER		TYPE OF SURVEY		
THIRD	TP	(3) PH-		□ RI	EVISED RES	URVEY	
EDITION	DATE OF PHOTOGRAPH	Y DATE OF F	FIELD EDIT	   🗖 0. 🗆 0.	MAP CLASS . □IV. □V.	FINAL	
	SURVEY NUMBER	JOB NUMBI	ER	<u> </u>	TYPE OF SURVEY		
FOURTH		(4) PH		l D R	EVISED RES	ÜRVĒY	
EDITION	DATE OF PHOTOGRAPH	Y DATE OF F	TIELD EDIT		MAP CLASS	∏ <sub>EINA</sub> ,	

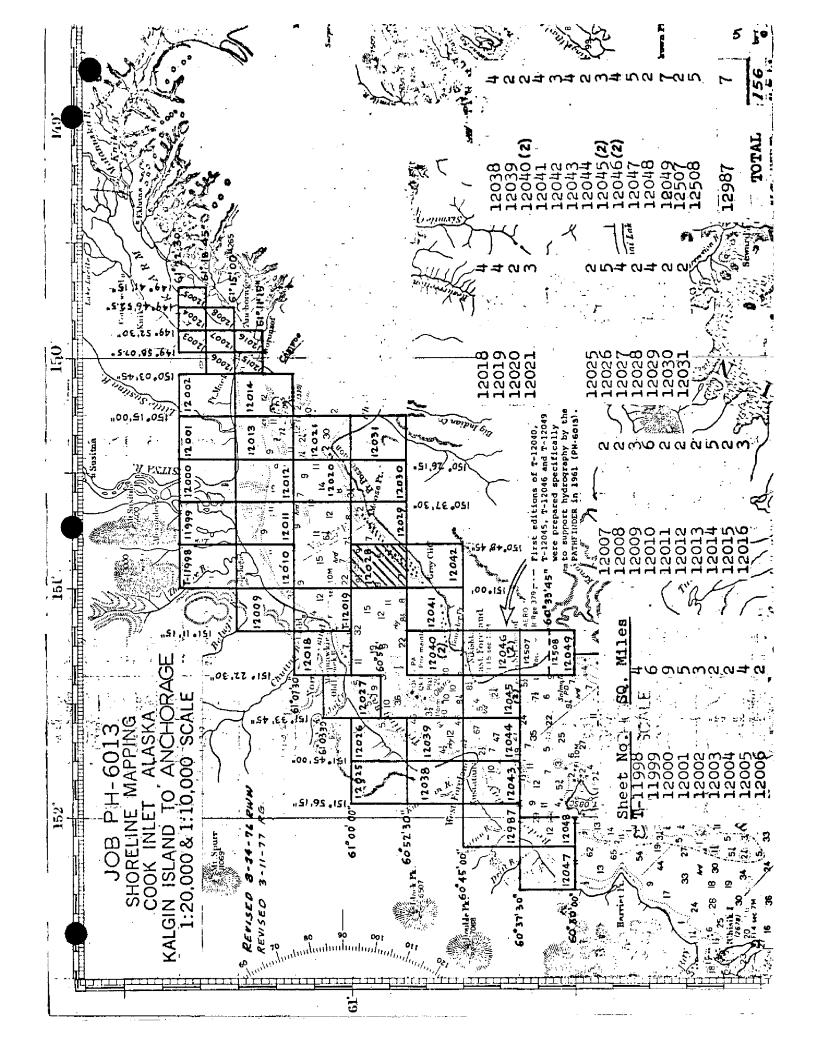

## SUMMARY TO ACCOMPANY DESCRIPTIVE REPORT

#### T-12028

This 1:20,000 scale Final shoreline map is one of 44 maps designated as Project PH-6013 Cook Inlet, Kalgin Island to Anchorage, Alaska. T-12028 was compiled from photography taken after the 1964 earthquake.

The purpose of this map was to provide contemporary shoreline in support of hydrographic operations and to aid in chart revision.

Field work prior to compilation in the 1961 field season consisted of recovery of horizontal control and limited field inspection. Field work in 1966 consisted of premarking of horizontal control for future aerotriangulation.

This area was flown in August 1966 with the RC-8 "L" camera using panchromatic film at 1:40,000 scale. The photography was used for bridging, compilation, and hydrographic support.

Aerotriangulation was performed in the Washington Office in April 1967.

T-12028 was compiled at the Norfolk office in June 1967.

Field edit was performed for T-12028 during the 1977 field season. Field edit data was applied at AMC in January 1978.

Final review was performed at the Atlantic Marine Center May 1986.

This Descriptive Report contains all pertinent information used to compile this Final Map. The original base manuscript and all related data were forwarded to the Washington Science Center for final registration.

## FIELD INSPECTION

#### T-12028

There was no field inspection prior to compilation. Field work accomplished was limited to the recovery and identification of the horizontal control necessary for the aerotriangulation of the project.

#### FIELD INSPECTION REPORT

#### COOK INLET, ALASKA

#### PROJECT SP-1-61 1961

USC&GS Ship PATHFINDER

Arthur L. Wardwell, CAPT., Comdg.

#### MANUSCRIPTS:-

12049, 12046, 12045, 12040, 12031, 12032, 12026, 12027, 12028, 12020, 12021, 12022, 12017, 12015, 12016, 12014, 12013, 12008, 12007, 12006, 12003, 12004, 12005, 12002, 12001, 12000, 12012, 11999, 12011, 11998, 12010, 12009, 12019, 12018, 12023, 12025, 12024, 12029, 12030, 1203; 12034, 12033, 12037, 12036

#### AERIAL FIELD INSPECTION:-

Areas inspected were as follows: Kanuscripts No. 12049, 12046, 12045, 12040, Kenai to Boulder Point, all shoreline and alongshore feature.

Balance of above listed manuscripts were used only for horizontal control identification.

The area is primarily moderately timbered with spruce, fir, alder and bear claw above the mean high water line. Shoreline varies from fine black silt at the mouth of the Kenai River mouth to large fragmented boulders at Boulder Point. Most of the beachline is sand and shingle interspersed with boulders of varying sizes. Numerous underground springs and some small creeks discharge small quantities of silt and water and are subject to constant change.

The area was inspected by cruising alongshore by launch and by walking the beach and bluff line. Foul areas now indicated on Chart No. 8553 are adequate. Two primary foul areas were noted as follows:

Kenai River Mouth

East Foreland to Moose Point

Quality of photographs was excellent. Areas of shadow were limited to the shoreline east of East Foreland and upper Knik Arm. No attempt was made to sketch in the mean high water line. Enough open areas in shadowed areas are available to adequately delineate mean high water line.

#### HORIZONTAL CONTROL:-

Four additional second-order triangulation stations were established between Kenai and East Foreland to supplement existing control in the area of hydrography. They were identified as follows:

AUDRY 1961 Manuscript No. 12049 Photo No. 1397

LOUISE 1961 " " 12049 " " 1402

BOO 1961 " " 12045 " " 1420

HELEN 1961 Traverse from East Foreland Light 1960.

Additional horizontal control recovery was made in upper Cook Inlet in accordance with project instructions. All stations were searched for and approximately 75 percent were recovered. Nost of the stations not recovered are considered lost. It is recommended that the next vessel assigned to this project be given a Tellurometer. Simple traverse between recovered triangulation stations would adequately control presently un-controlled flight lines.

In many cases the listed triangulation station was not recovered and a U.S. Engineers' triangulation station was used as a substitute. It appears that the U.S. Engineers could not recover listed C&GS control and substituted their own stations.

Great assistance was rendered by the 5040 Air Transport Squadron at Elmendorf AFB in furnishing heliocopter service. Three days of flying enabled personnel to cover shoreline control stations over the greater part of upper Cook Inlet.

If additional control is required in the vicinity of Elmendorf AFB, use can be made of triangulation now being observed by a C&GS geodetic party. Triangulation station DORF 1961 (in the vicinity of LOOP 2) is to be set in the roof of a building on the base. By use of the description written by the observing party, an accurate office identification can be made.

Triangulation not plotted on the Photo Index was identified where it was on photographs. This control was established by G.W.M. in 1959 and H.G.C. in 1960.

#### VERTICAL CONTROL:-

None recovered or established.

#### CONTOURS AND DRAINAGE:-

No contouring was attempted.

Primary drainage features are the Kenai, Matanuska, Little Susitna, Susitna, Beluga, Kustitan, and Drift Rivers. Tidal sweep keeps some of the rivers from building up deltaic features. An extremely flat foreshore on the Matanuska, Little Susitna, Susitna and Beluga rivers give rise to wide deltas that change seasonally. Many small streams discharge around Cook Inlet but have no apparent seasonal change.

#### WOODLAND COVER:-

The major portion of the area is wooded and interspersed with muskeg and open grassy areas. These are easily identifiable on the photographs. In areas of increasing cultural activity, the woodland cover is being removed. No attempt was made to indicate these areas.

#### SHORELINE AND ALONGSHORE FEATURES:-

The mean high water line is adequately delineated on manuscripts 12049, 12046, 12045, 12040. In the area of photo hydro signals IVY and refer, east of East Foreland, the mean high water line is as follows:

IVY 30 meters inside MHW EGG on piles at MHW

Most of the shoreline signals are located at NHW along the beach.

Many of the fishing huts set on piles at the base of the bluff were used as signals.

No attempt was made to delineate the low water line. Hydrography in the area should be satisfactory.

The foreshore area is primarily sand, small stones and boulders. The normal gradiation from stones at NHW to sand at NHW exists in all areas, except south of the Kenai River. In this area a heavy layer of silt is found in the tide zone.

#### OFFSHORE FEATURES:-

All offshore features are located by the hydrographer.

#### LANDMARKS AND AIDS:-

There are two fixed aids to navigation within the limits of the hydrographic project:

EAST FORELAND LIGHT

KENAI RIVER ENTRANCE RANGE

Both are located on Chart No. 8553.

One floating aid is also located on Chart No. 8553. Another can buoy is maintained by the oil company and is located just north of the pier.

One landmark for charts is recommended in the Descriptive Report for SP-1-61. This landmark is identified as follows:

KENAI TANK 1959, located by G.W.M. and identified on Photo No. 60/1400.

# BOUNDARIES, MONUMENTS AND LINES:-

OTHER CONTROL:-

Photo hydro signals were located in accordance with standard instructions. Signal IVY was found in error and relocated photogrammentrically, then verified by hydrographic cuts. Final location is shown on manuscript 12045.

Final location of photo hydro signals will remain in their relative position with the shoreline. Final compilation will cause a datum shift which will move both hydrography and signals the same relative amount.

#### DATUM DIFFERENCES:-

Radial plotting of photo identified control stations was made in the field. The following discrepancies were noted between plot positions and geographic positions.

EAST FORELAND LIGHT 1960	Lat.	-13.8 meters
	Long.	-75.4 meters
BOULDER (USE)	Lat.	-37.0 meters
	Long.	-45.2 meters
KENAI CHURCH STEEPLE 1909	Lat.	-15.3 meters
	Long.	-23.6 meters

#### CULTURAL FEATURES:-

Numerous fishing shacks are located along high water line in the area of hydrography. These huts are subject to damage by winter storms and are in a constant state of transition. No attempt was made to locate current huts.

The Nikiski Oil Pier was under construction at the time of photography. The completed dimensions are available from a blueprint of the structure submitted with descriptive report for Project SP-1-61.

· Respectfully submitted,

Robert E. Williams, Lieut. Comdr., C&GS

Devald C. Saladin Gerald C. Saladin MJG, C&GS

Fither J. Wardwell

Arthur L. Wardwell,

Captain, C&GS

Comdg., Ship PATHFINDER

#### PHOTOGRAMMETRIC PLOT REPORT Job PH-6013 Cook Inlet, Alaska

April 13, 1967

#### 21. Area Covered

The area covered by this report extends from the Redoubt Bay-East Foreland area to Anchorage, Alaska. Included in this area are T-sheets 11998 thru 12001, 12009 thru 12012, 12018, 12019, 12021, 12025 thru 12030, 12038, 12039, 12042 thru 12044, 12047, 12048 and 12987.

#### 22. Method

Five strips were bridged on the C-8 and C-5 stereoplanigraph. Strip #1 (66-L-6602 thru 6623) was adjusted on four triangulation stations with tie points used as checks. Strip #2 (66-L-6629 thru 6634) was adjusted on two triangulation stations plus tie points from Strip #1. Strip #3 (66-L-6641 thru 6653) was adjusted on three triangulation stations plus ties. Strip #4 (66-L-6667 thru 6677) was adjusted on three triangulation stations plus 6725) was adjusted on three triangulation stations.

### 23. Adequacy of Control

The control, being premarked, was very good insofar as being able to see it clearly; however, in several cases, the 1:40,000 scale photography completely missed the stations. It should be noted that all strips were adjusted with minimum control, and as such, no positive proof can be provided that the adjustments are correct other than by means of tie points and residuals of adjustment. The tie points and residuals do indicate a good adjustment on all strips. Strip #! had to be terminated at station SIT 1966 due to lack of control beyond this point. (Port McKenzie could not be seen on the 1:40,000 scale photography.) Attempts were made to provide a tie point for the terminal station on the east end of this strip by bridging three models south of Anchorage, dropping points onto Strip #4. This met with complete failure. Strip #6 had to be terminated on the southern end at station GRAY CLIFF 1909 since the station at East Foreland was not covered by the 1:40,000 scale photography.

### Supplemental Data

Local USGS quads were used to provide vertical control used in the bridging adjustment.

The coverage of 1966 photography falls short of being sufficient to show the shallow mud areas which are near lower-low water level in the area of the Susitna River Delta. To provide for the delineation of the limiting line of this feature, scale points have been selected which are common to 61M photography which does show the limiting line. Ratios of these photographs will be provided for the graphic delineation of the limiting line only. The compiler should select whatever additional points are necessary for correct delineation. A holiday exists on some of the shoreline along Strip #9. A flight of 60W photography provides coverage and three ratio photos were provided for compilation of this area.

All points on the bridged plates were drilled by PUG methods. Plate 66-L-6719 was broken after bridging. A new plate was provided but it does not contain any drilled points. It is suggested that the models on either side be compiled and pass points be dropped on this plate for compilation.

#### 25. Photography

Photography was adequate as to definition and overlap but was not adequate as to coverage. The 1:40,000 scale photos did not cover either the shoreline or the marked control on the east end of Strip #4 or the southwest end of Strip #9. A portion of the shoreline along the part of Strip #9 which was bridged also lacks coverage.

> Submicol Enthanking from Submitted by:

Paul Hawkins

/John D. Perrow, Jr.

#### COMPILATION REPORT

#### T-12028

#### 31. <u>DELINEATION</u>:

Delineation was by the Kelsh stereoplotter. Photography was adequate.

#### 32. CONTROL:

See the attached Photogrammetric Plot Report dated April 13, 1967.

#### 33. SUPPLEMENTAL DATA:

None.

#### 34. CONTOURS AND DRAINAGE:

Contours are not applicable to the project. Drainage was delineated by the Kelsh stereoplotter and by office interpretation of the photographs.

#### 35. SHORELINE AND ALONGSHORE DETAILS:

Alongshore details were delineated by the Kelsh stereoplotter and by office interpretation of the photographs.

The mean high water line was delineated from the photographs. The mean lower low water was delineated from 66L6716 at 0.2 ft. above MLLW.

#### 36. OFFSHORE DETAILS:

None.

#### 37. LANDMARKS AND AIDS:

No charted landmarks or aids were located during compilation.

#### 38. CONTROL FOR FUTURE SURVEYS:

No statement.

#### 39. <u>JUNCTIONS</u>:

See the attached Form 76-36B, Item 5 of the Descriptive Report, concerning junctions.

#### 40. HORIZONTAL AND VERTICAL ACCURACY:

Refer to the Photogrammetric Report dated April 13, 1967.

#### 46. COMPARISON WITH EXISTING MAPS:

A comparison was made with the following USGS Quadrangle: KENAI (D-3), ALASKA, scale 1:63,360, dated 1951, revised 1960.

#### 47. COMPARISON WITH NAUTICAL CHARTS:

A comparison was made with the following Coast and Geodetic Survey Chart: No. 8553, scale 1:194,154, 7th Edition, dated May 17, 1965.

#### ITEMS TO BE APPLIED TO NAUTICAL CHARTS IMMEDIATELY:

None.

#### ITEMS TO BE CARRIED FORWARD:

None.

Submitted by:

L. Graves

Cartographic Technician

Wort C. Rauck. In-

June 1967

Approved:

Albert C. Rauck, Jr.

Chief, Coastal Mapping Section

albut C. Ranck. In.

GEOGRAPHIC NAMES

FINAL NAME SHEET

PH-6013 (Cook Inlet)

T-12028

Cook Inlet

Kenai National Moose Range

Approved by:

A. J. Wraight Chief Geographer

Prepared by:

Frank W. Pickett Cartographic Technician

# Field Edit Report Number Three Bay to Miller Creek Tyonek to Ivan River OPR-469-FA-77

#### GENERAL

This report covers the following manuscripts:

T-11998 T-11999 T-12009 T-12010 T-12011 T-12019 T-12020 T-12028 T-12029 T-12030 T-12041 T-12042

Field work is essentially complete on all maps.

The northern shore between North Foreland and Shorty Creek is characterized by sand and gravel beaches, backed by dirt bluffs in some areas, with small mud flats in the vicinity of the Tyonek Timber Company pier and Shorty Creek which are exposed at low tides. The rest of the northern shore is low and gently sloping with marshy areas above high water and extensive mud flats exposed at low tide.

The entire southern shore is littered with rocks and boulders, often to considerable distances from shore. Beach areas are sand and gravel with occasional areas of mud flats, not as extensive as found on the northern shore. Dirt bluffs line most of the beach.

A total of 153 fixes were taken to locate significant features along 44 nautical miles of shoreline. Each was assigned a number with the format DDD-FF, where DDD represents the julian day of the fix and FF represents the sequential fix number for that day.

All fix information is recorded in the field edit data volume. Fix times are given in Greenwich mean time. All height information is noted on the master field edit ozalid. Information on all signals and stations used for control is included with this report. Deletions are noted in green ink, additions and changes in red ink, verifications in violet ink. All are noted on the master field edit ozalid.

#### METHOD

Field edit along the southern shoreline was done by LTJG Neal Millett and ENS Robert Crowell during the month of June, 1977. Work was performed at low tidal stages using a 17 foot skiff equipped with a Mini-ranger console and transceiver. Copies of the field edit ozalids and corresponding photographs were examined in the field. General features, including the mean high water line, were verified by visual comparison of the field edit ozalid

and the areas concerned.

Detached positions and heights were obtained on the more significant rocks. Control for fixes was by range-range and range-azimuth. In several instances sextant angles were also taken. Heights were estimated by comparison to a boathook of known length.

Field edit along the northern shoreline was done by LTJG Neal Millett and ENS Robert Crowell during the month of July, 1977. Initial field edit was done by helicopter at a low tidal stage. Copies of the field edit ozalids and corresponding photographs were examined in the field. Verification of general features, including the mean high water line, was done by visual comparison of the field edit ozalid and the area concerned. No control was used for this phase.

Follow-up field edit was done in those areas where detached positions were needed. Work was done using a 29 foot launch equipped with. Raydist electronic positioning equipment. Control for fixes was a combination of range-range, used to locate the launch, and visual. Three lines of position were determined to each object by taking horizontal sextant angles from the launch. The position of the launch was provided by the Raydist system. Heights were estimated by comparison to nearby objects of known size.

#### ADEQUACY OF COMPILATION

Compilation of the maps is generally adequate. Not all existing rocks on the southern shore were located due to their large numbers. Photography at low tidal stages would best accomplish this.

#### MAP ACCURACY

The positions of horizontal control stations as they plotted on the maps were compared to surrounding features, in some cases by measurement. These comparisons generally gave good results. Fix accuracy, as indicated by check fixes, was good.

#### RECOMMENDATIONS

It is recommended that the maps be revised as noted on the master field edit ozalid and then be accepted as advanced manuscripts. Improved photography, both in coverage and quality, would aid all stages of field edit.

#### INDIVIDUAL MANUSCRIPTS

Details specific to each manuscript are included in the following individual reports.

Map T-12028 Gray Cliff, NE of

#### METHOD

Due to the large number of boulders, only the more significant and those outside the revised foul limits were located. The positions of rocks comprising the foul limits were verified in the field.

#### ADEQUACY OF COMPILATION

Several areas were incorrectly labelled rocky reefs. These are actually shoal areas littered with rocks and boulders. They have been so noted on the field edit ozalid.

#### MAP ACCURACY

No checks on horizontal accuracy, other than field verification of some rocks and check fixes, were performed.

#### FOUL LIMITS

Sounding lines were run inside the revised foul limits during high tides. The limits are still valid as the areas are unsafe for all but shallow draft vessels at any tidal stage.

Submitted by:

Robert B Crowell LTJG, NOAA

Approved by:

Bruce I Williams
Commanding Officer
NOAA Ship Fairweather

#### REVIEW REPORT SHORELINE

T-12028

#### 61 - GENERAL STATEMENT

See Summary included with this Descriptive Report.

62 - COMPARISON WITH REGISTERED TOPOGRAPHIC SURVEYS

Not applicable.

63 - COMPARISON WITH MAPS OF OTHER AGENCIES

Not applicable.

#### 64 - COMPARISON WITH CONTEMPORARY HYDROGRAPHIC SURVEYS

A comparison was made with Hydrographic Survey H-9896, 1:20,000 scale, July 6, 1979. There were no major conflicts.

#### 65 - COMPARISON WITH NAUTICAL CHARTS

A comparison was made with the following NOS Charts: 16662, scale 1:100,000, 1st edition, April 9, 1983 16660, scale 1:194,154, 22nd edition, May 8, 1982.

The listed charts compared well with this manuscript.

#### 66 - ADEQUACY OF RESULTS AND FUTURE SURVEYS

This map complies with the Project Instructions, and meets the requirements for National Standards of Map Accuracy.

Submitted by

Final Reviewer

Approved for forwarding

Billy H. Barnes

Chief, Photogrammetric Section

Approved

Chief, Photogrammetric Production Sec. Chief, Photogrammetry Branch

FORM C&U3-8132

#### NAUTICAL CHART DIVISION

#### **RECORD OF APPLICATION TO CHARTS**

FILE WITH DESCRIPTIVE REPORT OF SURVEY NO.

#### INSTRUCTIONS

A basic hydrographic or topographic survey supersedes all information of like nature on the uncorrected chart

1. Letter all information.

2. In "Remarks" column cross out words that do not apply.

3. Give reasons for deviations, if any, from recommendations made under "Comparison with Charts" in the Rev

CHART	DATE	CARTOGRAPHER	REMARKS
	·	<del> </del>	Full Part Before After Verification Review Inspection Signed Via
			Drawing No.
			Full Part Before After Verification Review Inspection Signed Via
			Drawing No.
			Full Part Before After Verification Review Inspection Signed Via
			Drawing No.
			Full Part Before After Verification Review Inspection Signed Via
			Drawing No.
			Distance in the second
	<del></del>		Full Part Before After Verification Review Inspection Signed Via
			Drawing No.
		<u> </u>	
			Full Part Before After Verification Review Inspection Signed Via
			Drawing No.
			Full Part Before After Verification Review Inspection Signed Via
			Drawing No.
			Full Part Before After Verification Review Inspection Signed Via
	<del></del>	<del></del>	Drawing No.
<del> -</del>			
	<del></del>		Full Part Before After Verification Review Inspection Signed Via
		<u> </u>	Drawing No.
			Full Part Before After Verification Review Inspection Signed Via
	<del></del>		Orawing No.
_			

