

TP-01157

TP-01157

NOAA FORM 76-35
(6-80)U.S. DEPARTMENT OF COMMERCE
NATIONAL OCEANIC AND ATMOSPHERIC ADMINISTRATION
NATIONAL OCEAN SURVEY

DESCRIPTIVE REPORT

THIS MAP EDITION WILL NOT BE FIELD EDITED.

Map No.

TP-01157

Edition No.

1

Job No.

CM-8200

Map Classification

CLASS III FINAL

Type of Survey

SHORELINE

LOCALITY

State

ALASKA

General Locality

CAPE KILOKAK TO CAPE KUMLIK

Locality

CAPE KUMLIK

19 82 TO 19 83

REGISTERED IN ARCHIVES

DATE

NOAA FORM 76-36A (3-72)		U. S. DEPARTMENT OF COMMERCE NATIONAL OCEANIC AND ATMOSPHERIC ADMIN.	
DESCRIPTIVE REPORT - DATA RECORD		TYPE OF SURVEY <input checked="" type="checkbox"/> ORIGINAL <input type="checkbox"/> RESURVEY <input type="checkbox"/> REVISED	
PHOTOGRAMMETRIC OFFICE Pacific Marine Center Seattle, Washington		SURVEY TP. <u>01157</u> MAP EDITION NO. <u>(1)</u> MAP CLASS <u>III Final</u> JOB <u>RM- CM 8200</u>	
OFFICER-IN-CHARGE David W. Yeager		LAST PRECEDING MAP EDITION TYPE OF SURVEY <input type="checkbox"/> ORIGINAL <input type="checkbox"/> RESURVEY <input type="checkbox"/> REVISED JOB PH- _____ MAP CLASS _____ SURVEY DATES: 19__ TO 19__	
I. INSTRUCTIONS DATED			
1. OFFICE		2. FIELD	
Aerotriangulation Feb. 15, 1984 Office July 24, 1984		Field Feb. 5, 1982 Field (Change 1) May 21, 1982	
II. DATUMS			
1. HORIZONTAL: <input checked="" type="checkbox"/> 1927 NORTH AMERICAN		OTHER (Specify) None	
2. VERTICAL: <input checked="" type="checkbox"/> MEAN HIGH-WATER <input type="checkbox"/> MEAN LOW-WATER <input checked="" type="checkbox"/> MEAN LOWER LOW-WATER <input type="checkbox"/> MEAN SEA LEVEL		OTHER (Specify) None	
3. MAP PROJECTION Transverse Mercator		4. GRID(S) STATE Alaska ZONE 6	
5. SCALE 1:20,000		STATE ZONE	
III. HISTORY OF OFFICE OPERATIONS			
OPERATIONS		NAME	DATE
1. AEROTRIANGULATION BY METHOD: Analytic LANDMARKS AND AIDS BY		S. Solbeck	April 1984
2. CONTROL AND BRIDGE POINTS PLOTTED BY METHOD: CHECKED BY		D. Norman S. Solbeck	April 1984 April 1984
3. STEREOSCOPIC INSTRUMENT PLANIMETRY BY COMPILATION CHECKED BY		D. Butler J. Minton	Dec. 1984 Dec. 1984
INSTRUMENT: CONTOURS BY SCALE: CHECKED BY		N.A. N.A.	
4. MANUSCRIPT DELINEATION PLANIMETRY BY METHOD: CHECKED BY		D. Holeski J. Minton	Feb. 1985 Feb. 1985
CONTOURS BY CHECKED BY		N.A. N.A.	
SCALE: HYDRO SUPPORT DATA BY CHECKED BY		N.A. N.A.	
5. OFFICE INSPECTION PRIOR TO FIELD EDIT BY		N.A.	
6. APPLICATION OF FIELD EDIT DATA BY CHECKED BY		N.A. N.A.	
7. COMPILATION SECTION REVIEW Class III BY		J. Minton	July 1985
8. FINAL REVIEW Class III BY		L. O. Neterer, Jr.	Nov. 1985
9. DATA FORWARDED TO PHOTOGRAMMETRIC BRANCH BY		L. O. Neterer, Jr.	Dec. 1985
10. DATA EXAMINED IN PHOTOGRAMMETRIC BRANCH BY		P. Dempsey	Jan 1986
11. MAP REGISTERED - COASTAL SURVEY SECTION BY		E. DAUGHTERY	FEB 1986

NOAA FORM 76-36B
(3-72)U. S. DEPARTMENT OF COMMERCE
NATIONAL OCEANIC AND ATMOSPHERIC ADMINISTRATION
NATIONAL OCEAN SURVEY

TP-01157

COMPILATION SOURCES

1. COMPILATION PHOTOGRAPHY

CAMERA(S) (focal length 152.74 mm) Wild R.C. 10 "B"		TYPES OF PHOTOGRAPHY LEGEND (C) COLOR (P) PANCHROMATIC (I) INFRARED		TIME REFERENCE	
TIDE STAGE REFERENCE <input checked="" type="checkbox"/> PREDICTED TIDES <input type="checkbox"/> REFERENCE STATION RECORDS <input type="checkbox"/> TIDE CONTROLLED PHOTOGRAPHY				ZONE Alaska	<input checked="" type="checkbox"/> STANDARD <input type="checkbox"/> DAYLIGHT
				MERIDIAN 150°W	
NUMBER AND TYPE	DATE	TIME	SCALE	STAGE OF TIDE	
82B(C)6461 and 6462	Jul. 19, 1982	11:26	1:50,000	6.8 ft. above MLLW	
82B(C)6465 thru 6568	Jul. 19, 1982	11:43	1:50,000	7.1 ft. above MLLW	
83B(I)5509 and 5510	Aug. 25, 1983	10:13	1:50,000	1.5 ft. below MLLW	
83B(I)5849 thru 5852	Aug. 26, 1983	9:44	1:50,000	0.3 ft. above MLLW	
83B(I)5500 thru 5502	Aug. 26, 1983	9:55	1:50,000	1.2 ft. below MLLW	

REMARKS

Tide levels were calculated for Anchorage Bay subordinate station using Kodiak as the reference station. Mean High Water is 8.1 feet above Mean Lower Low Water.

2. SOURCE OF MEAN HIGH-WATER LINE:

The Mean High Water Line was compiled on a Wild B-8 stereoplotter using the color photographs listed above.

3. SOURCE OF MEAN LOWER LOW-WATER LINE:

The Mean Lower Low Water Line was compiled graphically from the infrared enlargements listed in item one above. See the aerotriangulation report for the enlargement ratio. These prints were controlled with pass points which were selected and positioned during the compilation of the MHW line described in item two above.

4. CONTEMPORARY HYDROGRAPHIC SURVEYS (List only those surveys that are sources for photogrammetric survey information.)

SURVEY NUMBER	DATE(S)	SURVEY COPY USED	SURVEY NUMBER	DATE(S)	SURVEY COPY USED

5. FINAL JUNCTIONS

NORTH	EAST	SOUTH	WEST
TP-01154 & TP-01155	TP-01158	No Survey	No Survey

REMARKS

NOAA FORM 76-36C
(3-72)U. S. DEPARTMENT OF COMMERCE
NATIONAL OCEANIC AND ATMOSPHERIC ADMINISTRATION
NATIONAL OCEAN SURVEYTP-01157
HISTORY OF FIELD OPERATIONSI. ☒ FIELD INSPECTION OPERATION (premarking) ☐ FIELD EDIT OPERATION

OPERATION	NAME	DATE
1. CHIEF OF FIELD PARTY	R. Melby	June 1982
2. HORIZONTAL CONTROL	RECOVERED BY R. Melby	June 1982
	ESTABLISHED BY R. Melby	June 1982
	PRE-MARKED OR IDENTIFIED BY L. Riggers/S. Feher	June 1982
3. VERTICAL CONTROL	RECOVERED BY N.A.	
	ESTABLISHED BY N.A.	
	PRE-MARKED OR IDENTIFIED BY N.A.	
4. LANDMARKS AND AIDS TO NAVIGATION	RECOVERED (Triangulation Stations) BY None	
	LOCATED (Field Methods) BY None	
	IDENTIFIED BY None	
5. GEOGRAPHIC NAMES INVESTIGATION	TYPE OF INVESTIGATION <input type="checkbox"/> COMPLETE BY <input type="checkbox"/> SPECIFIC NAMES ONLY <input checked="" type="checkbox"/> NO INVESTIGATION	
6. PHOTO INSPECTION	CLARIFICATION OF DETAILS BY	None
7. BOUNDARIES AND LIMITS	SURVEYED OR IDENTIFIED BY	N.A.

II. SOURCE DATA

1. HORIZONTAL CONTROL IDENTIFIED and paneled

2. VERTICAL CONTROL IDENTIFIED
N.A.

PHOTO NUMBER	STATION NAME	PHOTO NUMBER	STATION DESIGNATION
	ATTI, 1982 KUMLIK, 1925		

3. PHOTO NUMBERS (Clarification of details)

None

4. LANDMARKS AND AIDS TO NAVIGATION IDENTIFIED

None

PHOTO NUMBER	OBJECT NAME	PHOTO NUMBER	OBJECT NAME

5. GEOGRAPHIC NAMES: ☐ REPORT ☒ NONE6. BOUNDARY AND LIMITS: ☐ REPORT ☒ NONE


7. SUPPLEMENTAL MAPS AND PLANS

None

8. OTHER FIELD RECORDS (Sketch books, etc. DO NOT list data submitted to the Geodesy Division)

Field Operations Report and NOAA Forms 76-53 for paneled control, and
preselected photo - hydro stations.

NOAA FORM 76-36D (3-72)		U. S. DEPARTMENT OF COMMERCE NATIONAL OCEANIC AND ATMOSPHERIC ADMINISTRATION TP-01157 RECORD OF SURVEY USE		
I. MANUSCRIPT COPIES				
COMPILATION STAGES			DATE MANUSCRIPT FORWARDED	
DATA COMPILED	DATE	REMARKS	MARINE CHARTS	HYDRO SUPPORT
Class III Compilation complete	July 1985	Class III Manuscript		
Final Reviewed	Nov. 1985	Class III Final Map	16/12/85	16/12/85
II. LANDMARKS AND AIDS TO NAVIGATION None				
1. REPORTS TO MARINE CHART DIVISION, NAUTICAL DATA BRANCH				
NUMBER	CHART LETTER NUMBER ASSIGNED	DATE FORWARDED	REMARKS	
2. <input type="checkbox"/> REPORT TO MARINE CHART DIVISION, COAST PILOT BRANCH. DATE FORWARDED: _____ 3. <input type="checkbox"/> REPORT TO AERONAUTICAL CHART DIVISION, AERONAUTICAL DATA SECTION. DATE FORWARDED: _____				
III. FEDERAL RECORDS CENTER DATA				
1. <input checked="" type="checkbox"/> BRIDGING PHOTOGRAPHS; <input checked="" type="checkbox"/> DUPLICATE BRIDGING REPORT; <input checked="" type="checkbox"/> COMPUTER READOUTS. 2. <input checked="" type="checkbox"/> CONTROL STATION IDENTIFICATION CARDS; <input type="checkbox"/> FORM NOS 567 SUBMITTED BY FIELD PARTIES. 3. <input checked="" type="checkbox"/> SOURCE DATA (except for Geographic Names Report) AS LISTED IN SECTION II, NOAA FORM 76-36C. ACCOUNT FOR EXCEPTIONS: _____ 4. <input type="checkbox"/> DATA TO FEDERAL RECORDS CENTER. DATE FORWARDED: _____				
IV. SURVEY EDITIONS (This section shall be completed each time a new map edition is registered)				
SECOND EDITION	SURVEY NUMBER TP - _____ (2)	JOB NUMBER PH - _____	TYPE OF SURVEY <input type="checkbox"/> REVISED <input type="checkbox"/> RESURVEY MAP CLASS <input type="checkbox"/> II. <input type="checkbox"/> III. <input type="checkbox"/> IV. <input type="checkbox"/> V. <input type="checkbox"/> FINAL	
	DATE OF PHOTOGRAPHY	DATE OF FIELD EDIT		
THIRD EDITION	SURVEY NUMBER TP - _____ (3)	JOB NUMBER PH - _____	TYPE OF SURVEY <input type="checkbox"/> REVISED <input type="checkbox"/> RESURVEY MAP CLASS <input type="checkbox"/> II. <input type="checkbox"/> III. <input type="checkbox"/> IV. <input type="checkbox"/> V. <input type="checkbox"/> FINAL	
	DATE OF PHOTOGRAPHY	DATE OF FIELD EDIT		
FOURTH EDITION	SURVEY NUMBER TP - _____ (4)	JOB NUMBER PH - _____	TYPE OF SURVEY <input type="checkbox"/> REVISED <input type="checkbox"/> RESURVEY MAP CLASS <input type="checkbox"/> II. <input type="checkbox"/> III. <input type="checkbox"/> IV. <input type="checkbox"/> V. <input type="checkbox"/> FINAL	
	DATE OF PHOTOGRAPHY	DATE OF FIELD EDIT		

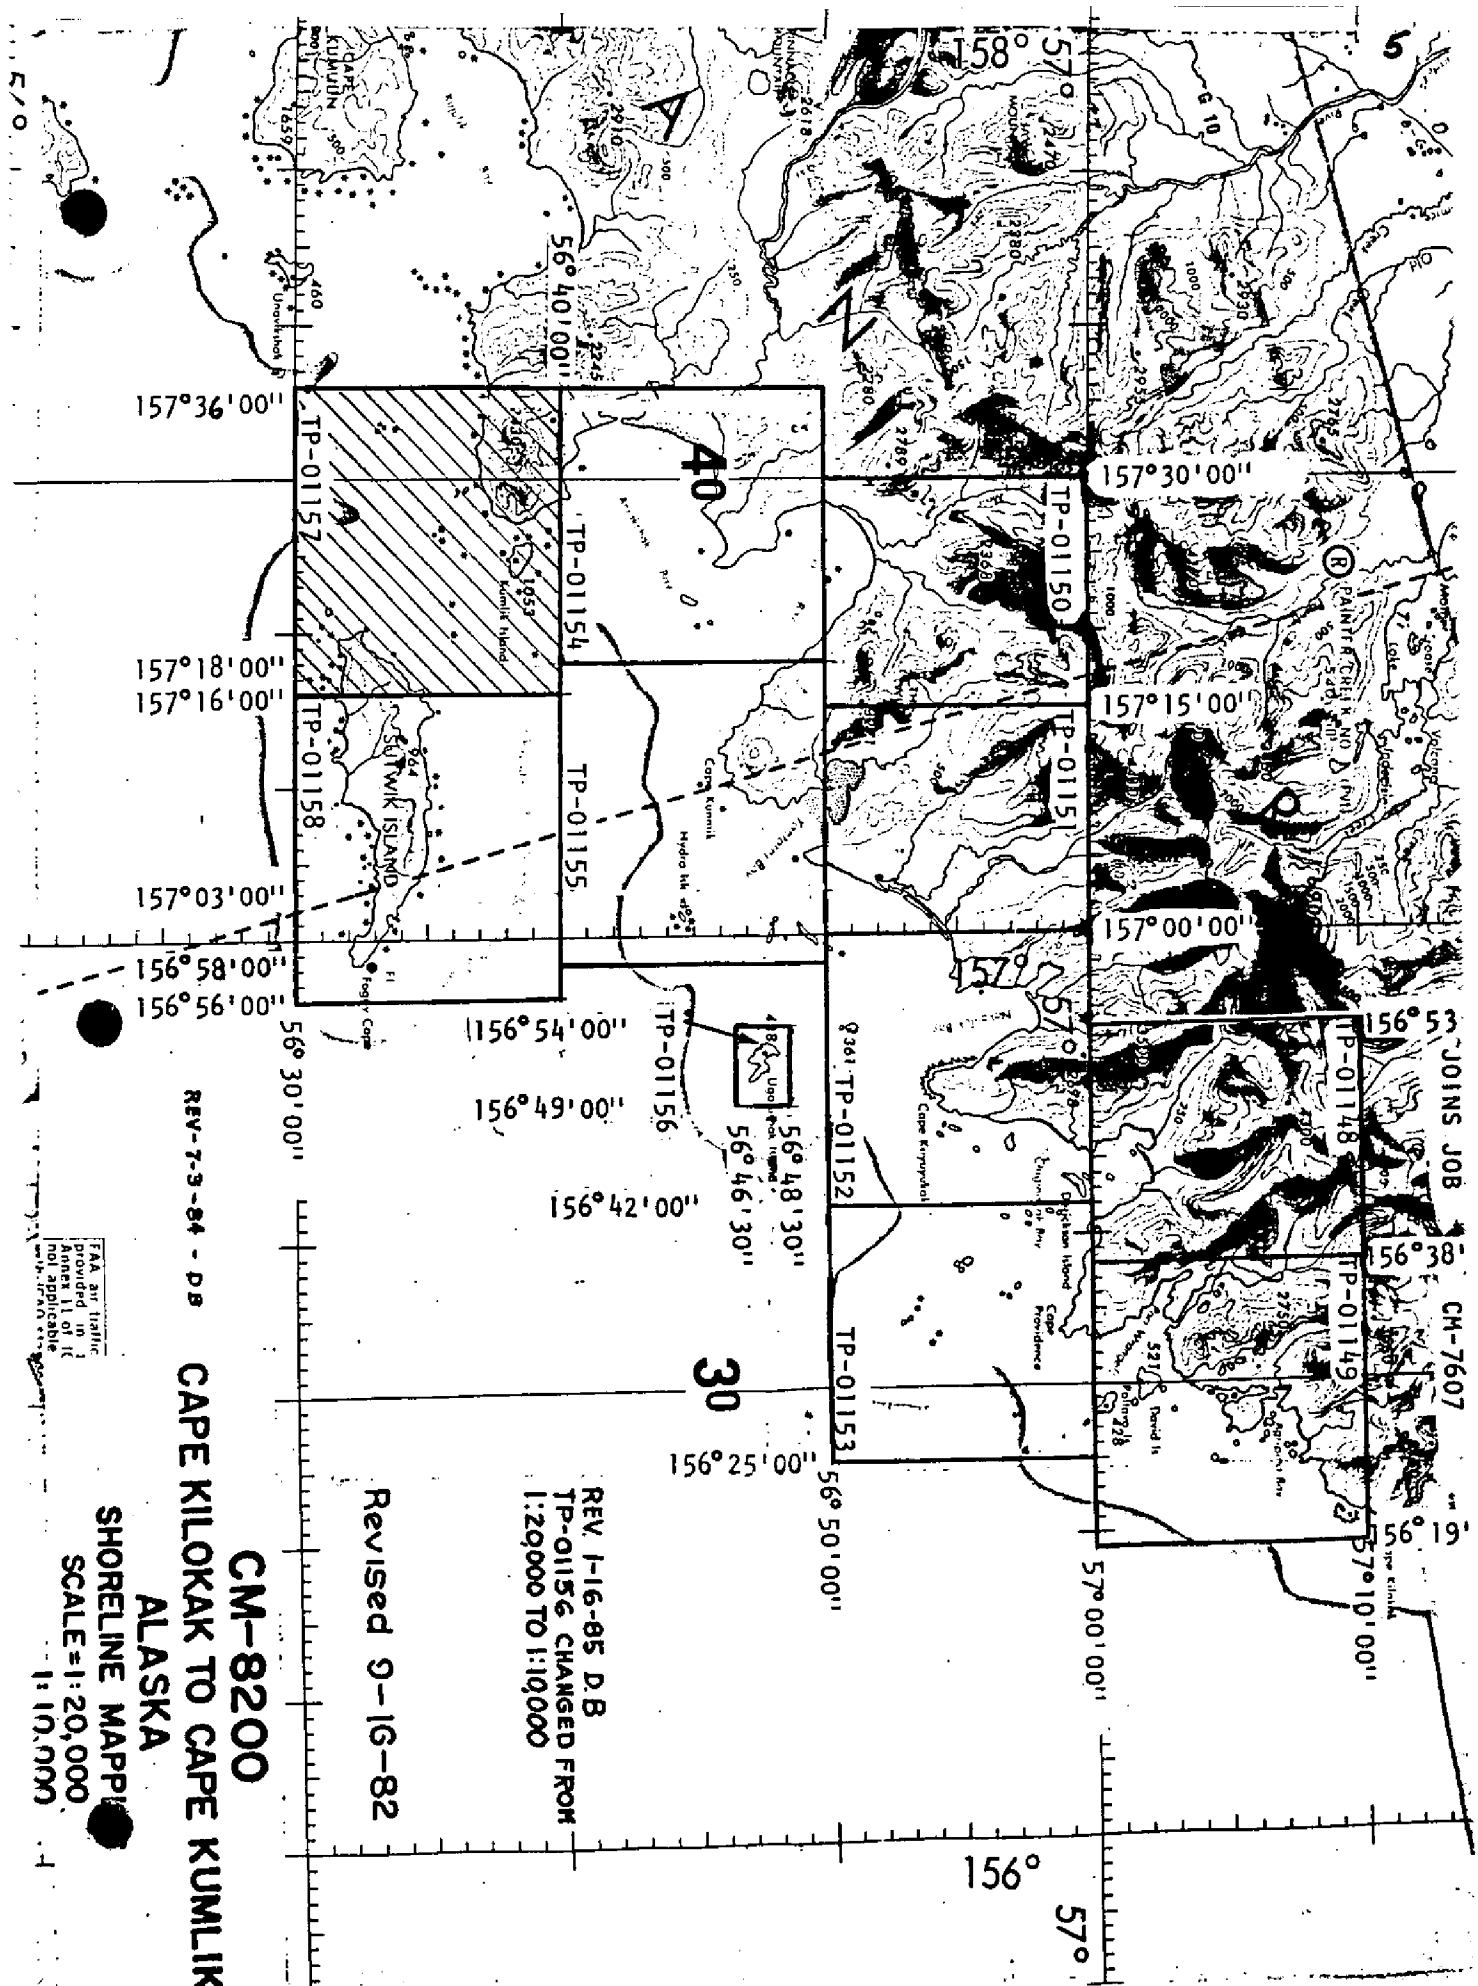

REV-7-3-84 - DB

CAPE KILOKAK TO CAPE KUMLIK

CM-8200

ALASKA

SHORELINE MAP

SCALE 1:20,000

1:10,000

FAA air traffic
provided in
Annex 11 of IC
not applicable

Revised 9-16-82

REV 1-16-85 DB
TP-01156 CHANGED FROM
1:20,000 TO 1:10,000

JOINS JOB CM-7607

SUMMARY TO ACCOMPANY
DESCRIPTIVE REPORT

TP-01157

This 1:20,000 scale shoreline map is one of eleven maps that comprise project CM-8200 Cape Kilokak, Alaska latitude 57°10'00 south to Cape Kumlik, Alaska latitude 56°30'00". This project includes Sutwik Island.

Photographic coverage was provided in July 1982 with color film at 1:50,000 scale and in August 1983 with black-and-white infrared film at 1:50,000 scale. The Wild RC-10 "B" camera (focal length 152.74 mm) was used for all photography.

Field work prior to compilation, accomplished in June 1982, involved the identification of horizontal control by premarking techniques to meet aerotriangulation requirements.

Analytic aerotriangulation was performed at the Washington Science Center in April 1984.

Compilation was performed at the Pacific Marine Center from office interpretation of the 1982 and 1983 photography in July 1985.

Final Review was performed at the Atlantic Marine Center in November 1985. This map is to be registered as a Final Class III map.

The original base map and all pertinent data were forwarded to the Washington Science Center for final registration.



U.S. DEPARTMENT OF COMMERCE
National Oceanic and Atmospheric Administration
 NATIONAL OCEAN SURVEY
 Pacific Marine Center
 1801 Fairview Avenue East
 Seattle, Washington 98102

August 10, 1982

CPM133/RBM

TO: C3415 - National Ocean Survey

FROM: CPM133 - Pacific Photo Party

SUBJECT: Field Operations Report - Project CM-8200, Cape Kilokak to Cape Kumlik, Alaska, Shoreline Mapping dated February 5, 1982

This shoreline mapping project was undertaken by the Pacific Marine Center Photogrammetric Party during the month of June 1982.

The purpose of the field project was to place panels on selected, horizontal control stations, prior to the scheduled, aerial photography.

Each of the selected stations were paneled as per project instructions.

Additional points were paneled to allow their positioning during the aerotriangulation and monumented to permit future recovery. These points are designated as "PR" Points. "PR" numbers less than 50 are marked with a P-K nail through an aluminum washer, with the point designation stamped on it, and driven into the bare rock, such as PR 10 1981. Numbers above 50 were marked with a length of 3/4" thin-wall conduit pipe, with the point designation stamped on the side of the pipe, such as PR 62 1982 and driven in the ground. A copy of a chart with the approximate location of these points will be included with the field data. Control Station Identification, Form 76-53, was filled out for each horizontal control station or point paneled.

Transportation was by a NOAA helicopter, based out of Port Heiden, Alaska, and Wide Bay, Alaska, with support by the NOAA Ship FAIRWEATHER.

Where stations were missing, new horizontal control was established by Third-order, Class I methods.

A problem developed with the present adjustment of the horizontal control in the area of Sutwik Island. NGS headquarters has been notified of this problem and will probably readjust the existing horizontal control in this area. All field computations are based on the old 1948 adjustment. Station SHANE 1982 was computed on this older adjustment also. Copies of the field observations by the NOAA Ship FAIRWEATHER are included to permit an interim position to be computed for SHANE.

Prior to any aerotriangulation, the National Geodetic Survey headquarters should be contacted (C131, McKay) to determine, if the final adjustment of the horizontal control in the project area, has been accomplished.

Edward J. McKay 443-8168



The horizontal control has been transmitted to NGS headquarters via the telephone data terminal. Again, all computations and positions are based on the old 1948 adjustment to permit consistency of data.

Respectfully Submitted,

Robert B. Melby

Robert B. Melby
Chief, PMC Photo Party



U.S. DEPARTMENT OF COMMERCE
National Oceanic and Atmospheric Administration
 NATIONAL OCEAN SURVEY
 Pacific Marine Center
 1801 Fairview Avenue East
 Seattle, Washington 98102

August 10, 1982

CPM133/RBM

TO: C174 - National Ocean Survey

FROM: CPM133 - Pacific Photo Party

SUBJECT: Field Report, Cape Kilokak to Cape Kumlik, Alaska
 Project CM-8200, TSN No: 315 thru 365

Authority: Project Instructions, Field - Job CM-8200; Cape Kilokak to Cape Kumlik, Alaska, Shoreline Mapping dated February 5, 1982.

General: The project is along a section of the southeast shoreline of the Alaska Peninsula, Shelikof Strait, Alaska. The main purpose of the project was to premark horizontal control stations, prior to scheduled aerial photography. The supplemental horizontal control stations that were established by the field party, were to augment the existing control or to replace missing stations.

Terrain: The area is a barren, rainy, windswept coastline of the Alaska Peninsula, devoid of permanent human habitations or trees.

Personnel: Two employees of the NGS Mark Maintenance Program, one member of the Pacific Photo Party, and one Junior officer of the NOAA Ship FAIRWEATHER performed the field functions.

Transportation: Transportation was accomplished by a NOAA helicopter with support from the NOAA Ship FAIRWEATHER.

Equipment: 2 Wild T-2 theodolites
 1 Hewlett-Packard, Model 3808A EDM Instrument
 2 Tellurometers Model CA-1000
 1 0.5. Meter, Mirror Bar
 2 K&E Retrodirective Prisms
 Various tripods, signal poles, etc.

Field Methods: Third-order traverse methods were employed by the field party.

Computations: The field computations were performed with Hewlett-Packard hand held and desk calculators, and satisfactory results were obtained.

A problem developed during the field observations at statio KUMLIK 1925. The field observed, check angle, between BLU 1925 and SUT 1925, failed to agree by more than 20 seconds using the most recently published horizontal positions. (Adjustment of Nov 1976 (G-15838)). By reverting to the old lithograph, Geographic Positions, Vol. V, pages 35 and 81, Revised 6/10/48,



a satisfactory check angle was obtained. There appears to be a problem with the NOV 1976 readjustment, as the horizontal angle produced by inverses worked between KUMLIK to BLU and KUMLIK to SUT, using both the old and the 1976 adjustments, failed to agree by about 20 seconds. There appears a possible problem of rotation and an uneven lateral shift in the 1976 adjustment.

The NGS headquarters were alerted to the possible discrepancies, and stated that the final disposition of the adjustment in the area of Sutwik Island would not be finalized, until the field records of this project, are submitted to do a further comparison of observations at station KUMLIK, involving BLU and SUT.

All the positions used and transmitted through the telephone data terminal are the "old" Geographic Positions, to allow the field data to be consistent throughout, until the final horizontal control adjustment is made.

Records: All the field data was entered and processed through the NGS data telephone terminal.

Respectfully Submitted,

R. B. Melby

R. B. Melby
Chief, Pacific Photo Party

PHOTOGRAMMETRIC PLOT REPORT
Cape Kilokak to Cape Kumlik, Alaska
CM-8200
April 1984

AREA COVERED

The area covered by this report is the eastern shoreline of the Alaskan Peninsula, from Cape Kumlik, north to Cape Kilokak. The area is covered by eleven 1:20,000 scale manuscripts (TP-01148 through TP-01158).

METHOD

Seven strips of 1:50,000 scale color photographs and one strip of 1:12,000 scale color photographs (TP-01156) were bridged by Standard Analytic Aerotriangulation Methods. The horizontal control was premarked with positions being determined on a revised 1948 adjustment (see Field Report). Tie points were needed to supplement the premarked horizontal stations to control three of the strips. Tie points were also used to ensure the adequate junctioning between adjacent bridging strips.

The 1:50,000 scale bridging photographs provided two additional functions: one, to locate and identify a series of premarked hydrographic panels which are to be used in future hydrographic surveys in this area; the other being to provide ratio values for the 1:30,000 scale color compilation photographs and all of the 1:50,000 scale photographs used in the project.

Ratio values were determined for the bridging photographs, 1:30,000 scale color, and the black-and-white infrared photographs that are to be used for delineating MLLW and MHW. Ratios of the bridging and the MLLW photographs were ordered.

The positions of nineteen Hydrographic Control Stations were determined. All were measured on the 1:50,000 scale bridging photography. The panels of three Hydrographic Control Stations could not be identified and, therefore, were not positioned.

The manuscripts were plotted on the Calcomp 718 Plotter using the Alaska State Plane Coordinate System, Zone 6.

ADEQUACY OF CONTROL

Of the control provided, all held within the National Standards of Map Accuracy, except for station Goon, 1945. This station was paneled direct, but could not be held closer than 15 feet in X and 30 feet in Y. Upon completion of the photo mission, the field party did not return to verify that the panels, which had been set in place one month prior, had

remained in tact. station Goon, along with other paneled stations, did not appear on the photographs as sketched by the field party. This office is assuming that the panel marking station Goon had moved prior to being photographed. It was not held in the adjustment.

Except for station Goon, 1945, the control provided, proved to be adequate for completion of the project. Tie points were required in some areas to supply necessary horizontal control.

SUPPLEMENTAL DATA


USGS quardrangles were used to provide vertical control for the project.

Nautical Charts were used to locate aids and landmarks.

PHOTOGRAPHY


The coverage, overlap, and quality of the photographs proved adequate for completion of the project.

Submitted by:



Stephen H. Solbeck

Approved and Forwarded:




Don O. Norman
Chief, Aerotriangulation Unit

CM-8200 CAPE KILOKAK TO CAPE KUMLIK ALASKA

BRIDGING PHOTOGRAPHS


- 82B(C) 1:50000
- 82B(C) 1:12000
- ▲ HORIZONTAL CONTROL

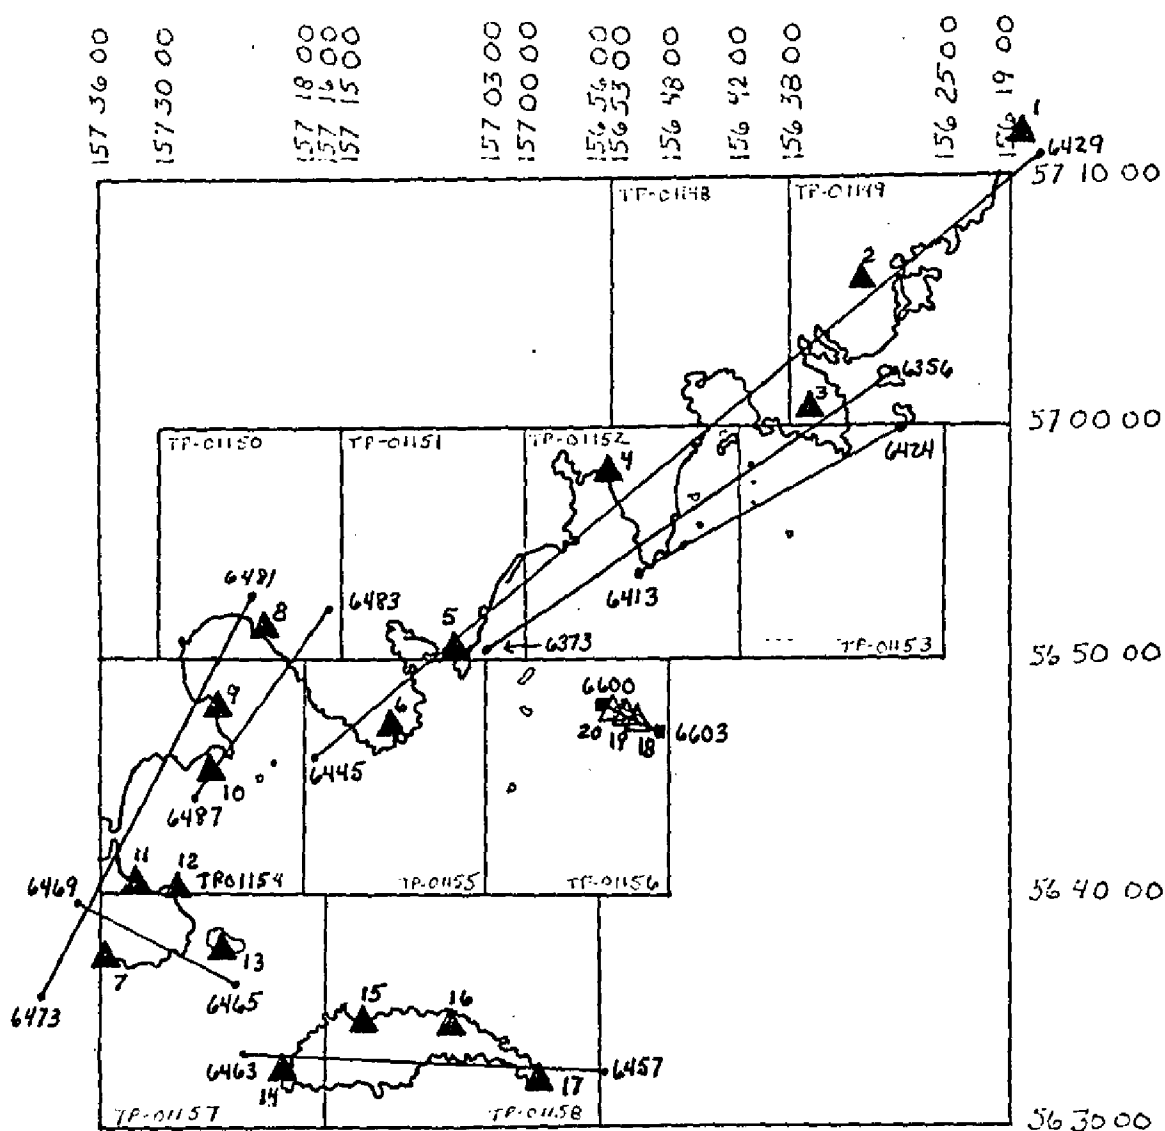

CM-8200 CAPE KILOKAK TO CAPE KUMLIK ALASKA

BLACK AND WHITE INFRARED PHOTOGRAPHS
MHW


- 83B(R) 1:50000
- 83B(R) 1:12000

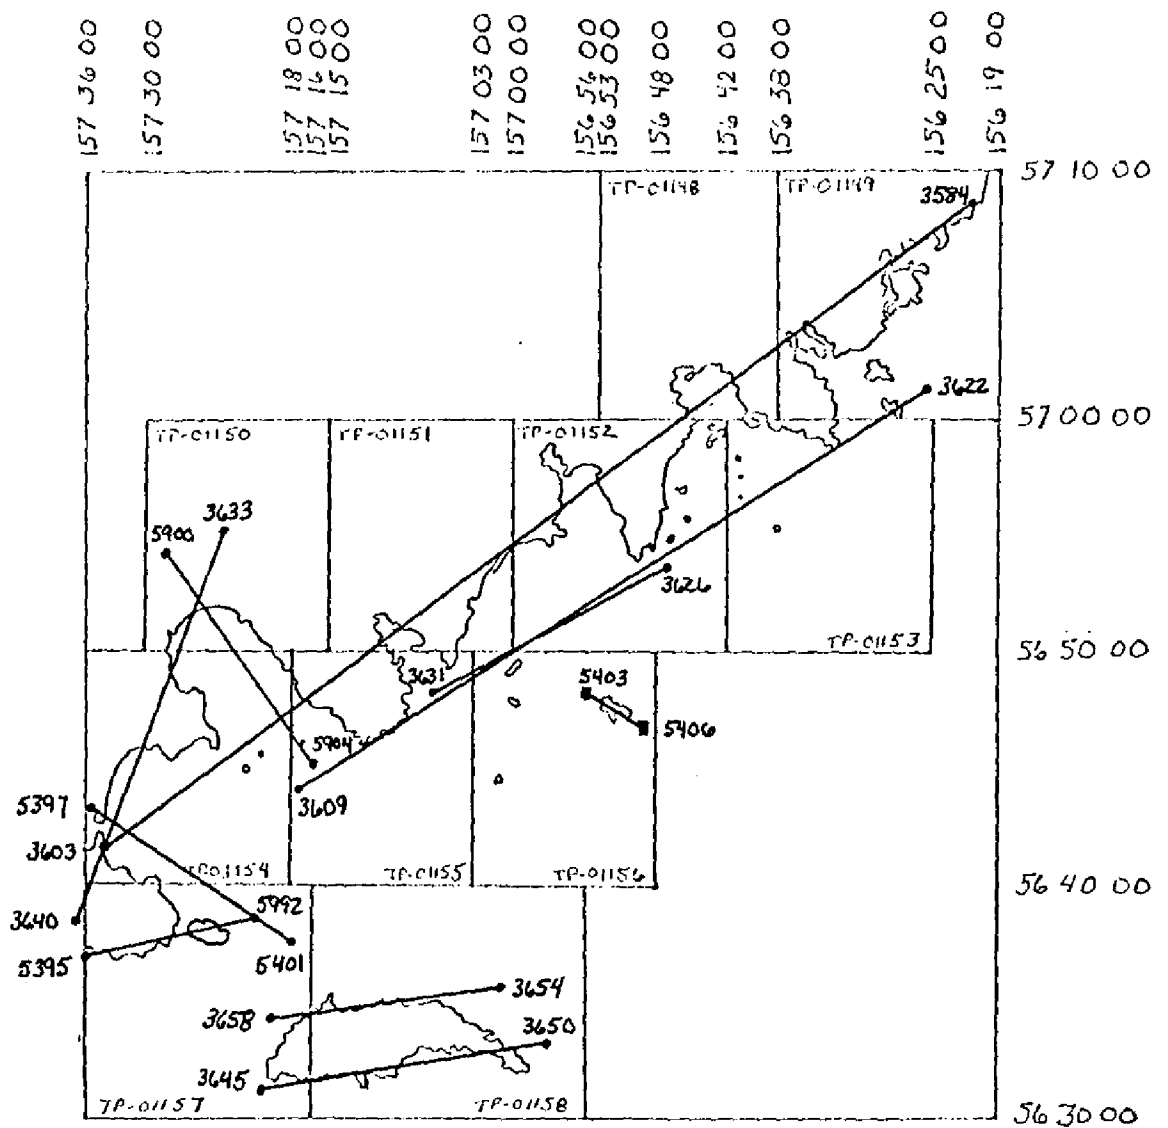

CH-8200 CAPE KILOKAK TO CAPE KUMLIK ALASKA

BLACK AND WHITE INFRARED PHOTOGRAPHS
MLLW

- 83 B(R) 1:50000
- 83 B(R) 1:12000

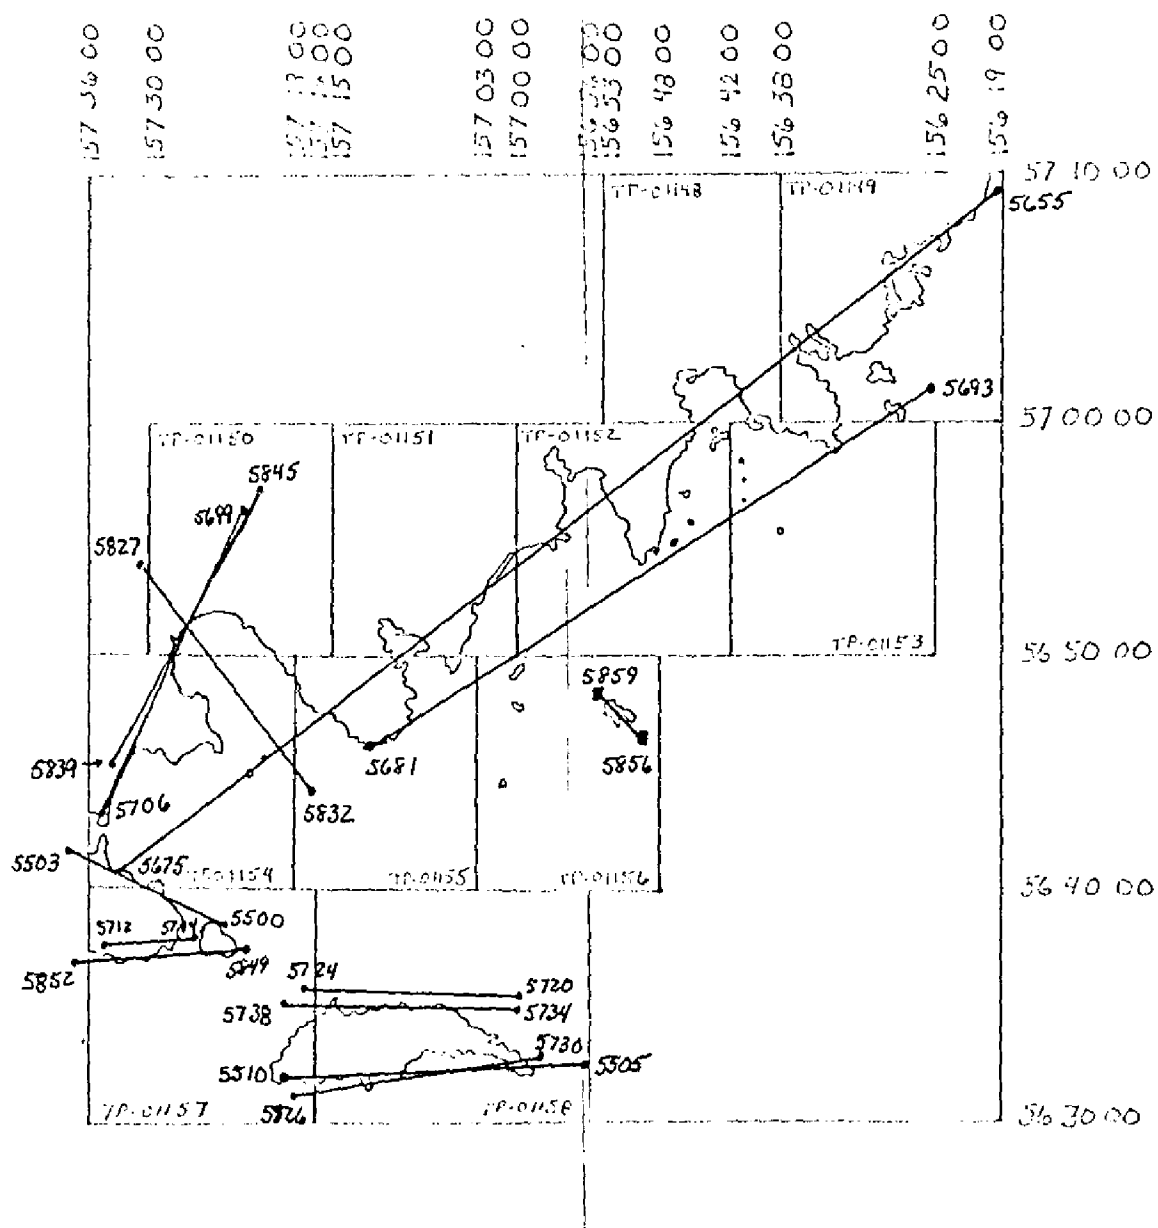

REFERENCE TO SKETCH OF BRIDGING PHOTOGRAPHS

1	SHANE, 1982	(429100)
2	LAGOON, 1944	(433100)
3	PORT, 1944	(435100)
4	NAKOLILOK E. BASE, 1944	(438100)
5	YANT, 1944	(442100)
6	KUNMIK, 1944	(444100)
7	RUSS, 1982	(469100)
8	ASPEN, 1945	(481100)
9	GOON, 1945	(479100)
10	LAND, 1945	(478100)
11	LAG, 1945	(468100)
12	BLU, 1925	(467100)
13	KUMLIK, 1925	(465100)
14	ATTI, 1982	(462100)
15	SUT, 1925	(461100)
16	WIK, 1925	(460100)
17	FOGGY CAPE LIGHT, 1944	(458100)
18	HAWK, 1944	(603100)
19	HUEY, 1982	(602100)
20	UGAI, 1944	(600100)

Fit to Control

<u>Station Name</u>	<u>Values in Feet</u>	
	<u>X</u>	<u>Y</u>
<u>1:12,000</u>		
<u>STRIP #1</u>		
OGAI, 1944	600100△	.001 -.001
HUEY, 1982	602100△	.000 .000
HAWK, 1944	603100△	.000 .000
<u>1:50,000</u>		
<u>STRIP #1</u>		
ATTI, 1982	462100△	-.307 .068
SUT, 1925	461100△	-.561 -.954
WIK, 1925	460100△	.873 .497
FOGGY CAPE LIGHT, 1944	458100△	-.004 .388
<u>STRIP #2</u>		
KUMLIK, 1925	465100△	.422 -.700
BLU, 1925	467100△	-2.398 .860
LAG, 1945 - Sub Point	468101△	1.938 .300
RUSS, 1982	469100△	.024 -.456
<u>STRIP #3</u>		
RUSS, 1982	469100△	-2.184 .991
LAG, 1945 - Sub Point	468101△	5.473 -1.354
LAND, 1945	478100△	-4.094 .753
GOON, 1945	479100	-15.787 -32.546
ASPEN, 1945	481100△	.806 -.388
<u>STRIP #4</u>		
GOON, 1945	479100	-15.482 -30.214
TIE from #3	485801△	-.172 .324
TIE from #3	485802△	-.189 -.390
TIE from #3	486801△	-.729 -.022
TIE from #3	486802△	-.310 -1.093

2

TIE FROM 3#	486803△	.881	.990
LAND, 1945	478100	-6.042	5.116
TIE FROM #3	487801△	.472	-.773
TIE FROM #3	487802△	-.963	.813
TIE FROM #3	487803△	.900	.051

STRIP #6

SHANE, 1932 - Sub Point	429101△	.838	-1.243
LAGOON, 1944	433100△	-2.495	3.446
PORT, 1944	435100△	1.204	-2.546
NAKOLILOK E. Base, 1944	438100△	-.038	.454
YANT, 1944	442100△	1.785	-.397
KUNMIK, 1944	444100△	-1.290	.293

SIRIP #7

ALL POINTS ARE TIES	356801△	1.099	-.088
FROM STRIP #6	356802△	-1.134	1.198
	356803△	.794	.266
	357801△	-2.517	-1.172
	357802△	.991	-1.309
	357803△	-1.949	.448
	358801△	2.983	-.853
	358802△	1.302	.231
	358803△	.840	1.773
	360801△	.320	.020
	360802△	-1.647	.175
	360803△	-2.752	.519
	362801△	2.019	1.803
	362802△	-.686	.804
	362803△	.151	-3.205
	364801△	-.485	1.800
	364802△	-.670	1.288
	364803△	1.380	.985

3

365801	.948	1.272
365802	-.842	-.433
365803	-.458	-.873

STRIP #8

TIES FROM #6	413801	-.026	.789
#6	413802	-.191	2.415
#6	413803△	-1.430	1.784
#6	413804	-.566	.704
#6	413805	-3.305	.638
TIE FROM #7	413806	-.407	-2.578
#7	413807	.371	-.638
#7	413808	-2.094	.115
#7	414801	3.171	-.452
#7	414802△	2.085	-1.015
#7	414803	3.397	-4.059
TIE FROM #6	360801△	2.766	-1.955
#6	360802	1.186	1.216
#6	360803△	-2.546	-.019
TIE FROM #7	416801	2.708	3.426
#7	416802△	1.537	1.787
#7	416803	-.989	-.915
TIE FROM #6	417801△	-3.838	1.437
#6	417802	-3.929	1.244
TIE FROM #7	417804△	.109	-.675
#7	417805	-.753	.041
#7	417806	-.479	-.108
#7	417807	-1.098	-.992
PORT, 1944	435100△	-.016	-1.680
TIE FROM #7	419801△	1.225	-.138
#7	419802	2.174	-1.229
#7	419803	.490	1.077
TIE FROM #6	356801△	1.294	1.127

4

TIE FROM #6	356802	2.300	2.957
#6	356803	-2.906	-3.178
TIE FROM #7	420802 Δ	-1.186	-.653
#7	420803	-.779	-1.627

 Δ STATIONS HELD IN THE STRIP ADJUSTMENTS

Ratio Values
 CM-8200
 Cape Kilokak to Cape Kumlik, Alaska

1:50,000 Color Bridging Photographs Ratio Value

82 B(C)	6356 thru 6365	2.565
	6413 " 6420	2.559
	6429 " 6445	2.567
	6457 " 6463	2.564
	6465 " 6469	2.569
	6473 " 6481	2.568
	6483 " 6487	2.562
	6600 " 6603 (1:12,000)	.608

1:50,000 Black-and-White-Infrared Photographs-MHW

83 B(C)	3584 thru 3603	2.538
	3609 " 3622	2.535
	3626 " 3631	2.543
	3633 " 3640	2.538
	3644 " 3650	2.537
	3654 " 3658	2.539
	5392 " 5395	2.573
	5397 " 5401	2.571
	5403 " 5406 (1:12,000)	.606

1:50,000 Black-and-White Infrared Photographs-MLLW

83 B(R)	5500 thru 5503	2.491
	5505 " 5510	2.487
	5655 " 5675	2.497
	5681 " 5693	2.500
	5699 " 5706	2.500
	5712 " 5714	2.503

2

83 B(R) 5720 thru 5724	2.503
5726 " 5730	2.504
5734 " 5738	2.502
5827 " 5832	2.538
5839 " 5845	2.557
5849 " 5852	2.545
5856 " 5859 (1:12,000)	.584

1:30,000 Color Compilation Photographs

82 B(C) 6606 thru 6615	1.531
6624 " 6626	1.532
6649 " 6659	1.526
6660 " 6661	1.526
6665 " 6676	1.530
6693 " 6703	1.529
6708-09, 6711-13, 6715-18	1.532
6885	1.524
8438 thru 8442	1.527
8444 " 8447	1.526
8467 " 8473	1.520
8484 " 8487	1.533
8490-93, 8495-96	1.529
8503 thru 8505	1.523
8515 " 8522	1.536
8576 " 8584	1.500
8651 " 8656	1.531

DESCRIPTIVE REPORT CONTROL RECORD

MAP NO. TP-01157	JOB NO. CM-8200	STATION NAME	SOURCE OF INFORMATION (Index)	AEROTRI- ANGULATION POINT NUMBER	GEODETIC DATUM North American 1927		ORIGINATING ACTIVITY Photogrammetric Sec., Seattle, WA	
					COORDINATES IN FEET STATE ZONE	GEOGRAPHIC POSITION ϕ LATITUDE λ LONGITUDE	REMARKS	
ATTI, 1982	Field Comp. of Triangulation	462100			X=	ϕ 56° 32' 19.760"		
					Y=	λ 157° 19' 31.329"		
KUMLIK, 1925	G.P. Vol. V Pg 35	465100			X=	ϕ 56° 38' 22.255"		
					Y=	λ 157° 24' 38.686"		
					X=	ϕ		
					Y=	λ		
					X=	ϕ		
					Y=	λ		
					X=	ϕ		
					Y=	λ		
					X=	ϕ		
					Y=	λ		
					X=	ϕ		
					Y=	λ		
					X=	ϕ		
					Y=	λ		
					X=	ϕ		
					Y=	λ		
					X=	ϕ		
					Y=	λ		
COMPUTED BY					COMPUTATION CHECKED BY		DATE	
LISTED BY	V. McNeel				LISTING CHECKED BY	Thornton	DATE 08/25/82	
HAND PLOTTING BY					HAND PLOTTING CHECKED BY		DATE	

Compilation Report

TP-01157

31. Delineation

Delineation was accomplished by a combination of stereo instrument and graphic methods. The color bridging photographs were used in conjunction with a Wild B-8 to compile the MHW line and interior detail as well as bare and awash rocks. Pass points were also selected and positioned on the B-8 to control the enlarged infrared photographs taken at predicted mean lower low water. These were used to graphically compile the MLLW line, ledges and additional rocks which may not have been visible on the color bridging photographs because of the difference in water level. Complete photo coverage was not provided for this manuscript. Consequently, no detail could be compiled south of a line from approximately 56°36'N/157°33'W to 56°33'N/157°24'W and east of a line approximately 56°39'N/157°22'W to 56°36'N/157°22'W (see the compilation manuscript for exact limit lines).

32. Control

As discussed in the preceding photogrammetric plot report, dated April 1984, control is adequate.

33. Supplemental Data

None.

34. Contours and Drainage

Contours are not required on this project. Drainage was delineated on the stereoplotter from the color 1:50,000 scale bridging photographs.

35. Shoreline and Alongshore Details

The preceding form 76-36B, as well as section 31 of this report detail the sources and method used to compile the shoreline and alongshore detail. Standard symbolization was used throughout this manuscript. Infrared contact prints 83B (I) 5392 through 5394 and 83B (I) 3645 through 3646 were provided and used as interpretive aids. The tide level displayed on these 1:50,000 scale prints was calculated to be 0.8 and 1.8 feet (respectively) below Mean High Water.

36. Offshore Detail

Offshore detail was compiled in the same manner as shoreline and alongshore detail discussed in the preceding section of this report.

37. Landmarks and Aids to Navigation

There are no charted landmarks or Aids to Navigation within this manuscript.

38. Control for Future Surveys

None

39. Junctions

Refer to the preceding form 76-36B, item 5.

40. Horizontal and Vertical Accuracy

Refer to the preceding Photogrammetric Plot Report, dated April 1984.

46. Comparison with Existing Maps

A comparison was made with the following U.S.G.S. quadrangle:

SUTWIK ISLAND (C-4), Alaska, 1963, 1:63,360 scale
SUTWIK ISLAND (C-5), Alaska, 1963, 1:63,360 scale
SUTWIK ISLAND, Alaska, 1963, 1:250,000 scale

47. Comparison with Nautical Charts

A comparison was made with the following National Ocean Service chart:

Wide Bay to Cape Kumlik, 16568, 5th edition, December 9, 1978,
1:106,000 scale.

Items to be applied to Nautical Charts immediately: None.

Submitted by,

Daniel C. Holeski

Daniel C. Holeski

Cartographer

July 24, 1985

Approved:

James R. Minton

James R. Minton

Acting Chief, Photogrammetric Section

July 25, 1985

26
AUG 13 1985

GEOGRAPHIC NAMES


FINAL NAME SHEET

CM-8200 (Cape Kilokak to Cape Kumlik, Alaska)

TP-01157

Alaska Peninsula
Aniakchak Bay
Cape Kumlik
Kumlik Strait
Shelikof Strait
Sutwik Island

Approved:



Charles E. Harrington
Chief Geographer
Nautical Charting Division

REVIEW REPORT
SHORELINE

TP-01157

61 - GENERAL STATEMENT

See Summary included with this report.

Photo coverage was insufficient, due to the large water area, to compile all of the charted rocks.

62 - COMPARISON WITH REGISTERED TOPOGRAPHIC SURVEYS

Not applicable.

63 - COMPARISON WITH MAPS OF OTHER AGENCIES

A comparison was made with U.S.G.S. quadrangles:
Sutwik Island (C-4), Alaska, dated 1963,
Sutwik Island (C-5), Alaska, dated 1963; both are 1:63,360 scale;
Sutwik Island, Alaska, dated 1963, scale 1:250,000.

64 - COMPARISON WITH CONTEMPORARY HYDROGRAPHIC SURVEYS

There are no contemporary hydrographic surveys within the limits of this map.

65 - COMPARISON WITH NAUTICAL CHARTS


A comparison was made with the following NOS chart:
Preliminary Chart 16568, 5th edition, dated December 9, 1978, scale 1:106,600.

66 - ADEQUACY OF RESULTS AND FUTURE SURVEYS

This map complies with Project Instructions and meets the requirements for National Standards of Map Accuracy.


TP-01157

Submitted by



Lowell O. Neterer, Jr.
Final Reviewer
November 8, 1985

Approved for forwarding



Billy H. Barnes
Chief, Photogrammetric Section

Approved



Chief, Photogrammetric Section,
Rockville



Chief, Photogrammetry Branch,
Rockville

NATIONAL OCEANIC AND ATMOSPHERIC ADMINISTRATION

TO: N/MOP - Robert L. Sandquist

FROM: *[Signature]* N/CG2 - J. Austin Yeager *[Signature]* Frederick K. Ganjon

SUBJECT: Aerotriangulation Stations and Shoreline Accuracy for OPR-P180-FA-86

REF: Memorandum to N/MOP from Commanding Officer, NOAA Ship FAIRWEATHER, Same Subject, dated August 19, 1986

The Commanding Officer, NOAA Ship FAIRWEATHER S220, has established that the control points furnished by the Aerotriangulation Unit, Photogrammetry Branch (PB), for Job CM-8200, Cape Kilokak to Cape Kumlik, Alaska, have a datum shift of approximately 18 meters. PB investigated this discrepancy and found it correct. When this project was bridged by aerotriangulation, the control points used were based on a 1948 geodetic adjustment. A new geodetic adjustment was performed in 1976. This adjustment caused a datum shift in longitude of approximately 1 second and .05 to .1 second in latitude

Five geodetic control stations were selected from Job CM-8200 extending over the whole project. A comparison was made between the 1948 and 1976 adjustments.

Station	1948 Adjustment	1976 Adjustment	Datum Shift	Meters
Lagoon	57°06'02.626"	57°06'02.722"	.096"	2.97
1944	156°30'28.250"	156°30'29.290"	1.040"	17.50
Port	57°00'40.699"	57°00'40.792"	.093"	2.87
1944	156°35'41.795"	156°35'42.836"	1.041"	17.57
Yant	56°50'45.505"	56°50'45.579"	.074"	2.29
1944	157°06'22.039"	157°06'23.072"	1.033"	17.51
Sut	56°34'17.611"	56°34'17.673"	.062"	1.92
1925	157°12'56.916"	157°12'57.916"	1.000"	17.08
Lag	56°40'38.729"	56°40'38.779"	.050"	1.55
1954	157°31'53.263"	157°31'54.285"	1.022"	17.40

N/CG2311:PDempsey:443-8340:
jls:9/17/86:Aero/Alaska:APK2

FILE COPY

CODE	SURNAME	DATE	CODE	SURNAME	DATE
N/CG2311	<i>Wright</i>	<i>9/17/86</i>			
N/CG2311	<i>Brewer</i>	<i>9/17</i>			

The mean value of this adjustment is 17.4 meters in longitude and 2.3 meters in latitude. This should be taken into consideration when applying these manuscripts.

A copy of this Memorandum will be inserted in each Descriptive Report for Job CM-8200.

cc:

N/MOP21 - Richards

N/CG22 - Nortrup

N/CG23 - Brewer

N/CG24 - Matsushige

RECORD OF APPLICATION TO CHARTS

FILE WITH DESCRIPTIVE REPORT OF SURVEY NO.

INSTRUCTIONS

A basic hydrographic or topographic survey supersedes all information of like nature on the uncorrected chart

1. Letter all information.
2. In "Remarks" column cross out words that do not apply.
3. Give reasons for deviations, if any, from recommendations made under "Comparison with Charts" in the Re-

[illegible]