FORM C&G\$-504

U.S. DEPARTMENT OF COMMERCE ENVIRONMENTAL SCIENCE SERVICES ADMINISTRATION COAST AND GEODETIC SURVEY

DESCRIPTIVE REPORT

Type of Survey	SHORELINE
Field NoC	Office No. T-10727
LOCAL	ITY
State ALASKA	
General locality KUIU ISLA	ND - SUMNER STRAIT
Locality POINT AME	Lius
195	 55_61
CHIEF OF J. E. Waugh, Chief of W. E. Randall, Beltin Alfred C. Holmes, Dir LIBRARY &	Field Party sore Photo Office rector, A. M. G.
DATE	

FORM	C&GS-	18 lo

DESCRIPTIVE REPOR	RT - DATA RECORD - 10727
OJECT NO. (II):	
PH-5702	
FIELD OFFICE (II):	CHIEF OF PARTY
SHIP HODGSON	J. E. Waugh
PHOTOGRAMMETRIC OF FICE (III):	OF FICER-IN-CHARGE
Baltimore, Maryland	W. E. Randall
INSTRUCTIONS DATED (II) (III):	
October 29, 1957 Project d November 27, 1957 22/MEK, S November 20, 1957 Office September 11, 1959 Office	iagram -2-HO
METHOD OF COMPILATION (III):	
Graphic	
MANUSCRIPT SCALE (III):	STEREOSCOPIC PLOTTING INSTRUMENT SCALE (III):
1:10,000	
TE RECEIVED IN WASHINGTON OFFICE (IV):	DATE REPORTED TO NAUTICAL CHART BRANCH (IV):
APPLIED TO CHART NO.	DATE: DATE REGISTERED (IV):
GEOGRAPHIC DATUM (III):	VERTICAL DATUM (III): M. H. W.
N. A. 1927	MEAN SEA LEVEL EXCEPT AS FOLLOWS:
	Elevations shown as (25) refer to mean high water Elevations shown as (5) refer to sounding datum
	i.e., meen low water or mean lower low water
REFERENCE STATION (III):	
RUTH 1937	
56° 11' 48.904" 1512.6 m. 133° 54' 14.883"	256.6 m. UNADJUSTED
PLANE COORDINATES (IV):	STATE ZONE
Y= 6,228, 323.08 m. X= 567,999.74 m.	Alaska UTM 8
MAN NUMERALS INDICATE WHETHER THE ITEM IS TO BE ENTERED OR (IV) WASHINGTON OFFICE. WHEN ENTERING NAMES OF PERSONNEL ON THIS RECORD GIVE THE	

DESCRIPTIVE REPORT - DATA RECORD

T-10727

2

	1-10/2/	
FIELD INSPECTION BY (II):	G. L. Short, H. H. Druebert	DATE: April-May 1958
	R. D. Bernard, R. E. Alderman	SeptOct. 1958
MEAN HIGH WATER LOCATION	(III) (STATE DATE AND METHOD OF LOCATION):	
	Office interpretation of 1955 and corrected by field edit in 1961.	l 1958 photographs,
PROJECTION AND GRIDS RULE	D BY (IV):	DATE
THOSE CHANNES ON DO THOSE CO	P. J. Dempsey	10-28-59
<u></u>		
PROJECTION AND GRIDS CHEC	KED BY (IV): R. D. Shoup	10-28-59
	rie ne moont	
CONTROL PLOTTED BY (III):	5 1113	DATE
	B. Wilson	11-12-59
CONTROL CHECKED BY (III):		DATE
	H. R. Rudolph	11-20-59
		, , ,
RADIAL PLOT OR STEREOSCOP	PIC CONTROL EXTENSION BY (III):	DATE
	L.A. Senasack	6-10-60
STEREOSCOPIC INSTRUMENT C	OMPILATION (III): PLANIMETRY	DATE
	CONTOURS	DATE
MANUSCRIPT DELINEATED BY	(III): B. Wilson	DAT4-20-60
Field edit applied:	J. Councill	12-12-61
SCRIBING BY (III):		DATE
PHOTOGRAMMETRIC OFFICE R	EVIEW BY (III): R. Glaser	DATE 4-21-60
Field edit review:	R. Glaser	12-14-61
		j

DESCRIPTIVE REPORT - DATA RECORD

T-10727

CAMERA (KIND OR SOURCE) (III):

Wild RC-8 "W" and 9-lens

		OTOGRAPHS (III)				
NUMBER	DATE	TIME	SCALE	ST	AGE OF TIE	 E
55 W 9579 thru 9582 55 W 9641 " 9643 575000	21 Sept 1955 22 Sept 1955 28 May 1958	15:28 09:35 14:08	1:25,000	11.1 f 4.4 f 2.4 f		MLLW n
		TIDE (III)	Predicted	<u> </u>		diurnal
		Of the contract of the contrac	•	RATIO OF RANGES	MEAN RANGE	XRHIX XX
REFERENCE STATION:	ITKA, ALASKA		_		7.7	9.9
PRDINATE STATION:	ort Beauclerc				10.0	12.2
SUBORDINATE STATION:			•			-
itlantic Marine Cente I MSHMMMMMMMMM REVIEW BY	r ′ (IV) :	C. H. Bishop)	DATE:	1-27-72	
PROOF EDIT BY (IV):				DATE:		
NUMBER OF TRIANGULATION ST	ATIONS SEARCHED FOR	t (11): 6	RECOVERED:	IDENTIFIE	:D: 2	
NUMBER OF BM(S) SEARCHED FO	OR (II):	None	RECOVERED:	IDENTIFIE	;D	
NUMBER OF RECOVERABLE PHO	TO STATIONS ESTABLIS	SHED (III): Non	e			
	HYDRO STATIONS EST	ABLISHED (III):	None	<u> </u>	- -	
NUMBER OF TEMPORARY PHOTO						

T-10727

COMPILATION RECORD	COMPLETION DATE	REMARKS
Copy for blueline	April 1960	Superseded
Field edit of Aug. 1961 applied (north portion of manuscript not field edited)	Dec. 1961	Supersedes all previous copies
Final review	Jan. 1972	
	,	

•	we sood of S	HORELIN	E MAF	PPING	PROJECT
	End of the second		Ph-57	02	
	Charles of the second			ION a SLANDS SKA	
		120 US	icial <u>File</u>	ace Por Co:	st Accounts ·
	KUIU J		heet` No.	Area Sq. Mi.	Lin. Mi. Shoreline
CHATHAI STRAIT	134°20'00" 10703 204 10705 10706 10707 107 10716 10717 10753 10719 10720 10721 10722 10723 10724 10725 1086 10727 10728 40729 10730 10724 10863 1032 19733 10734 10735 1032 19737 10869 10676 10527 10673 10679 CORONATION 10680 10581 10682 51. AND 55° 48' 45"		0676 06778 06678 06678 06681 070681 070681 070681 070709 07715 07718 07728 077	286318206944215142514038942418130650003616	31.76.56.96.74900.79450.11.01.5536.2735593.00147.00.6 11.12.7936.7 986.51.601.5536.2735593.00147.00.6 298.6

SUMMARY

DESCRIPTIVE REPORT T-10727

This shoreline manuscript, scale 1:10,000, is one of 45 maps that were planned for Project PH-5702, which includes the south half of Kuiu Island, Spanish Islands, and Coronation Island, in Southeast Alaska. Only 33 maps were compiled. T-10727 includes Point Amelius on the east side of Kuiu Island.

Compilation was by radial plot. A 1:20,000 scale plot, using 9-lens photography of 1958, was constructed to verify identified control and establish pass points to control a 1:10,000 plot using 1:10,000 scale ratio prints of single-lens photographs taken in September 1955. The 1:10,000 plot was constructed directly on the map manuscripts. In general, control was adequate for laying the plots. See Photogrammetric Plot Report, scale 1:20,000, dated 9 June 1960 and Photogrammetric Plot Report, scale 1:10,000, dated 10 June 1960.

Field edit was performed in 1961. No field edit report was available at the time of final review. Classification of this map is ADVANCE.

Final review was done at the Atlantic Marine Center in January 1972.

The compilation manuscript was a vinylite sheet 3 minutes 45 seconds in latitude by 5 minutes in longitude.

A cronaflex copy of the final reviewed manuscript and a negative have been forwarded for record and registry.

FIELD INSPECTION REPORT POINT ST. ALBANS TO ALVIN BAY 1958 FIELD SEASON

Manuscript No. T-10706, T-10707, T-10714 T-10715, T-10720, T-10721 T-10726, T-10727, T-10730 T-10731, T-10734, T-10735

2. AREAL FIELD INSPECTION

The area covered by this report includes the eastern side of Kuiu Island from Alvin Bay south to and including Point St. Albans.

The field inspection was confined to the areas in the immediate vicinity of the control stations.

The shoreline in this area is very irregular with many small bights and off-lying rocks. The foreshore consists generally of rock and boulder strewn beaches with rock ledges occuring on most points. The area is covered with a dense growth of conifers which usually extend inland from the HWL.

The rock outcroppings in this area are in general metamorphic limestone with igneous intrusions.

Densities and tones were not inspected on the land area. In the water areas it was confined to the immediate area of the control stations.

Photographic coverage consists of single lens aerial photographs at a scale of 1:25,000. The contact prints were furnished for field use. The definition on the prints was generally good, however, identification was difficult in some areas due to shadows caused by trees and terrain. The compiler may have difficulty in interpreting the MHWL in some areas due to overhanging trees and shadows.

3. HORIZONTAL CONTROL

All horizontal control stations for this area as indicated on the project diagram were searched for with the exception of BEULEK 1938 and UPPER 1938. BEULEK and UPPER are on mountain peaks and were impracticable to recover. Recovery of triangulation stations ALL 1927 and CLEW 1927 was not attempted since they fell north of the project limits and were not needed. Recovery notes were submitted on form 526 for all stations that were searched for.

It is recommended that three triangulation stations be considered lost:

BEG 1929 END 1929 CLERC 1915 No description was available for CLERC 1915 although a search was made in the immediate vicinity of its geographic position.

The published geographic position (unchecked) for station SEC 1929 is in error. A new position will be determined for this station when work resumes in the area.

All stations were positively identified with the exception of GENE 1937. It's identification was classified as doubtful on the Cont rol Identification Card.

After the receipt of the Director's letters dated 6-6-58 and 6-25-58; 711-1mh; additional work was accomplished in the Priority A area, except for Tebenkof Bay. All stations were positively identified by the selection of two substitute points, where possible.

Sixteen control stations in priority area A on the west side of Kuiu Island, southeast end of Tebenkof Bay, were searched for of which 9 were positively identified on photographs. Control identification cards for these nine stations and all photos on the diagonal flights are included as instructed in the note found on the project diagram.

4. VERTICAL CONTROL

Inapplicable

5. CONTOURS AND DRAINAGE

Contours - inapplicable

There are no important streams in the area inspected. There is some drainage with definite channels defined on the photographs.

6. WOODLAND COVER

The area is heavily wooded being covered with conifers, mostly spruce with some cedar. The trees extend inland from the HML.

7. SHORELINE AND ALONGSHORE FEATURES

The shoreline and alongshore features were inspected only in the area of the control stations and then only where skiff landings were made. No other inspection of the area was requested. The area will be field edited at the time of hydrography.

The only cultural features in the area are two trappers cabins used during the trapping season. One is on the eastern shore of Reid Bay and the other on the eastern shore of Port Beauclerc. Neither is identifiable on any of the photographs. The remains of an aban-

doned cannery also exist on the west shore of Port Beauclere, north-west of Edwards Island. There are no structures remaining.

8. OFFSHORE FEATURES

The offshore features were inspected only incident to the identification of the control stations. The area will be field edited at the time of hydrography.

9. LANDMARKS AND AIDS

There is one fixed aid to navigation in the area. It is:

Beauclero Island Light

The several floating aids to navigation in the area will be located at the time of hydrography.

10. BOUNDARIES, ETC.

Inapplicable

11. OTHER CONTROL

None

12. OTHER INTERIOR FEATURES

Inapplicable

13. GEOGRAPHIC NAMES

Will be covered in a special report.

14. SPECIAL REPORT AND DATA

Title

1. Photogrammetric Field Data

Disposition
Washington Office
with this report

15 - 20 NOT USED

Herman W. Druebert LTJG, C&GS

Approved and Forwarded

J. E. Waugh

CDR. C&GS

C. O., HODGSON

PHOTOGRAMMETRIC PLOT REPORT

Project Ph-5702

Scale 1:20,000

Surveys T-10706 thru T-10709

T-10713 " T-10715

T-10718 " T-10721

T-10724 " T-10731

T-10733 " T-10735

T-10737

T-10888 and T-10889

PURFOSE:

This radial plot was made using 1:20,000 nine-lens photographs. These wide coverage photographs were used to verify identified control and establish positions for pass points for use in controling photogrammetric plut using 1:10,000 scale single-lens photographs. See item No. 6 (Methods) of instructions dated 11 September 1959.

21. AREA COVERED

This radial plot covers the area of the surveys listed above. They are shoreline surveys along the west shore of Sumner Strait, embracing the areas known as Alvin Pay, Reid Bay, Port Beauclerc, Louise Cove, Bear Harbor, Kell Bay, Affleck Canal and Port McArthur.

22. METHOD - RADIAL PLOT

Base sheets with two thousand (2,000) meter grids in black ink, were furnished by the Washington Office.

The Coordinatograph was used to plot the control stations and substitute stations.

A sketch showing the layout of the surveys, distribution of control and photograph centers is attached to this report.

Photographs:

Thirty-six (36) nine-lens, unmounted photographs at a scale of 1:20,000 were used in this plot, numbered as follows:

57480 through 57485

57499 " 57506

57517 " 57527

57532 " 57542

Templets:

Vinylite templets were made using the master templet to correct for film and paper distortion, and chamber displacement.

Closure and Adjustment to Control:

This plot was laid in two parts, southern half and a northern half with the dividing line the area between surveys T-10724 through T-10727 common with both plots. Construction started with photograph 57532 and extended north to 57538. The plot was then extended eastward to the project limits, incorporating the flights 57522 through 57527 and 57499 through 57502.

The second part was an extension of the first part northward to the project limits.

Transfer of Points:

The pass points and photograph centers were pricked on the top templet and then drilled down through the templets and base sheets. Later the coordinatograph was used to scale the grid position of the pass points for transfer to the 1:10,000 map manuscripts.

23. ADEQUACY OF CONTROL

The density and distribution of control was adequate for all surveys in this radial plot.

See item 23 in the single-lens plot report, dated 10 June 1960, covering the same surveys as this plot.

24. SUPPLEMENTAL DATA

None.

25. PHOTOGRAPHY

The definition of the photographs was good. Due to the difference in time, tide and tone quality between the nine-lens and single lens photographs great difficulty was encountered in trying to prick the identified control on the nine-lens photographs. Great care had to be taken in trying to find a common pass point near the shoreline, one that would leave no doubt that it was the same as the point on the single-lens photographs.

Respectfully submitted 9 June 1960

Leroy A. Senasack (Carto. (Photo.)

```
AGO, 1954
        CON, 1927
       HOW, 1954
  4
        GAL, 1954
  5
       DELHI, 1915
  6
       BIB, 1954 ·
       REEF 2, 1915
  7
  8
       FOX, 1929
. 9
       NER, 1929
        THAT, 1927
 10
                                           1:
 11
       BAY, 1929
       FAG, 1929
RUT, 1929
 12
 13
 14
       PAR, 1929
 15
       DAL, 1929
 16
       UP, 1929
*17
       TWIN, 1926
       BARE, 1926
*18
*19
       ARM, 1926
*20
       MID, 1926
*21
       ROCK, 1926
≭22
       WON, 1925
*23
       GO 2, 1958
#24
       TRI, 1926
       LAST, 1926
 25
 26
       ROSE, 1937
 27
       POM, 1929
       TURN, 1929
 28
 29
       BOULDER, 1915
 30
       TRUS, 1937
 31
       EDNA, 1937
 32
       WEAK, 1937
       FLOR, 1937
GOOD, 1937
 33
 34
35
       PEGG, 1937
36
       GENE, 1937
       CORK, 1937
WESS, 1937
37
 38
39
       MON, 1929
40
       SUN, 1929
41
       BEAUCLERC 2 (LIGHT), 1922
42
       BEAR, 1936
43
       BITE, 1936
44
       ALECK, 1936
45
       BUDD, 1937
```

* On nine-lens photographs only.

```
46
47
        HOME, 1937
        PEN, 1936
48
        ENTER, 1936
49
        HIND, 1936
ADEN, 1937
50
51 52 53 54 55
        SOW, 1929
PIN, 1915
        RUTH, 1937
        VICK, 1937
HOPE, 1936
56
57
58
59
        BUSH, 1936
        DUB, 1936
MILT, 1937
        MACK, 1937
HOLM, 1937
60
61
        CLEVE, 1886-1922
62
        ARTHUR, 1936
63
       LEMON, 1936
NORTH, 1936
64
       LEMON POINT ROCK LIGHT, 1958
65
66
       STAR, 1936
67
        AFFLECK, 1936
68
       JUNE, 1937
69
       BETS, 1937
ALBANS, 1886
70
       MAC, 1899
MAC, 1936
71
72
73
       SHORE, 1923
74
       MIDDY, 1936
75
       ZAG, 1923
76
       CAPEDECISION LIGHT, 1936
77
       SPANISH ISLAND LIGHT, 1936
78
       WAY, 1936
```

PHOTOGRAMMETRIC PLOT REPORT

Project Ph-5702 Scale 1:10,000

Surveys Nos. T-10706 thru T-10709

T-10713 " T-10715 T-10718 " T-10721 T-10724 " T-10731

T-10733 " T-10735

T-10737

T-10888 and T-10889

21. AREA COVERED

This radial plot covers the area of the surveys listed above. They are shoreline surveys along the west shore of Sumner Strait, embracing the areas known as Alvin Bay, Reid Bay, Port Beauclerc, Louise Cove, Bear Harbor, Kell Bay, Affleck Canal and Port McArthur.

22. METHOD-RADIAL PLOT

Map Manuscripts:

Vinylite sheets with polyconic projections in black, U. T. M. Zone 8 grid in red, at a scale of 1:10,000 were furnished by the Washington Office.

All triangulation stations, substitute stations, and common pass point positions taken from the 1:20,000 radial plot were plotted using the Coordinatograph.

A sketch showing the layout of the surveys, distribution of control and photograph centers is attached to this report.

Photographs:

One hundred twenty-six (126) single-lens photographs, ratioed to a scale of 1:10,000 were used in this plot and are numbered as follows:

M	-9377	thru	9386		:	-	55-W-9	612	and 9	9613
	94004	l u	9412				9	667	thru	9674
	9443	Ħ	9457				9	678	17	9680
	9463	Ħ	9478				9	687	ŧj	9690
	9550	11	9570		•		. 9	696	11	9701
	9576	Ħ	9593				9	704		
	9611	Ħ	9649							

Templets:

Kodapak or vinylite templets were made of each of the single-lens photographs but no adjustment was made for paper distortion.

Closure and Adjustment to Control:

The common pass points were transferred from the 1:20,000 scale base sheets by scaling their grid position with the Coordinatograph and then plotting them on the 1:10,000 scale map manuscripts with the same instrument.

The radial plot was constructed directly on the map manuscripts.

This plot was laid in two parts, with the surveys Nos. T-10724 through T-10727 common in both plots. The first part was started at Cape Decision (Survey T-10738) and extended northward up Affleck Canal. After this was done the plot was extended eastward to the project limits. Due to some trouble with the field identification for control station BUSH, 1936 it may be advisable to reidentify this station. In the area between DUB, 1936 and ENTER, 1936 there is a flight of photographs the centers of which fall in the water. Since there is no field identified control, and only one control station office identified, this part of the plot is also considered fair.

The second part of the plot was extended northward but would not tie into control station ROSE, 1937. The two flights which go parallel with Port Beauclerc, taken in the morning with most of the pass points away from the tree shadows, are considered better. These two flights were extended from the mouth of Port Beauclerc to the head and tied into Sub Point A for ROSE, 1937. (See item 23) After this was done, the plot was extended northward to the project limits with no difficulty.

The definition on the photographs is very poor around BEAUCLERC LIGHT, 1915. It is a white object on what appeared to be white ledge and for this reason it is recommended that this Light, or ISLE, 1929 be reidentified by sub point method. The point on the office photographs is the same as the field identified point.

Transfer of Points:

The positions of all photograph centers and pass points were pricked on the top templets and then drilled through the templets and map manuscripts.

23. ADEQUACY OF CONTROL

In general, the density and distribution of control was adequate for this project. However, there are several gaps, some being where the field man was verifying the existence of the stations but did not identify them.

The following control stations could not be held in the plot:
BUSH, 1936 - Northing seems to agree at this station. The distance and direction of the plotted position does not agree with field identification on the contact print or the Form 152. The location of this station makes it a critical one for the construction of a good rigid radial plot. A note was attached to a field photograph and the hydrographer was requested to reidentify this station.

HCME, 1937 - The radially plotted position for this direct identification for this station falls approximately 1.1 mm to the NW of the plotted position. This point was reidentified in the office to agree with the description.

RUT, 1929 - The radially plotted position for the substitute station falls approximately 0.4 mm to the NE of the plotted position. Since there are numerous other field or office identified control stations in the vicinity, it is not essential for a rigid radial plot.

FAG, 1929 - The radially plotted position for the direct identification for this station falls approximately 4.4 mm to the SE of the plotted position. The nine-lens photographs verified the fact that the field man pricked some floating debris instead of the rock. This station was office identified and held in plot.

THAT, 1927 - The radially plotted position for this substitute station falls approximately 0.8 mm to the WSW of the plotted position. Both the station and substitute station was misidentified. The station was office identified and held in the plot.

FOX, 1929 - The radially plotted position for this substitute station falls approximately 1.0 mm to the east of the plotted position. There is another detached rock west of the identified point approximately the same place as the plotted position. It is believed that this station is another case of misidentification.

BIB, 1954 - The radially plotted position for substitute station "A" falls approximately 3.9 mm to the east of the plotted position. This is a case of misidentification.

The radially plotted position for substitute station "B" falls approximately 1.2 mm to the east of the plotted position. The field distance to this station is in error.

DELHI, 1915 - The radially plotted position for substitute station "A" falls approximately 2.1 mm to the NW of the plotted position. The field distance for this station is in error.

The radially plotted position for substitute station "B" falls approximately 2.5 mm SSW of the plotted position. This station was misidentified.

With the aid of the description, the triangulation station was office identified and held in the plot.

GAL, 1954 - The radially plotted position for substitute station "A" falls approximately 7.3 mm to the south of the plotted position. The field distance to this station is in error.

The radially plotted position for substitute station "B" falls approximately 8.0 mm SSE of the plotted position. This is another case of error made in the distance to this statior.

The triangulation station was office identified and held in the plot.

CON, 1927 - The radially plotted position for this substitute station falls approximately 0.9 mm to the NNE of the plotted position. This station appears to be misidentified.

The triangulation was office identified and held in the plot.

24. SUPPLEMENTAL DATA

None.

· F--

25. PHOTOGRAPHY

The majority of these photographs were taken late in the afternoon of one day while the rest were taken early in the morning of the following day. Due to the time the photographs were taken, large sections of the shoreline appears in deep shadow. These shadow areas created problems in trying to find common pass points. In many cases, due to deep shadow, good points on the nine-lens photographs were obscured on the single lens photographs.

In the area around Boulder Point, one photograph, 55-W-9700, had a very light washed-out area right in the vicinity of identified control station BOULDER, 1915. This created several problems in trying to use photographs 55-W-9612 and 9613. These photographs were taken the previous day, and time, tide, and shadow were different.

26. CONTROL IDENTIFICATION

Considerable difficulty was encountered while pricking field identified control throughout this project. It was noted that the distances between field identified image points of substitute stations disagreed with distances between computed positions. To aid in selecting the correct image points, a piece of clear vinylite to which the positions of stations and substitute stations were transferred was placed over one photograph when a pair was studied stereoscopically. Then, with the aid of sketch and description on identification card and with the original station description, the correct images of the substitute points were determined. The identification of many stations was changed from field identification where discrepancies were found.

Numerous stations in this project had distances to substitute points given in meters (by stadia). Most of these distances appeared to be in error, but the reason could not be determined. There was no factor that could be applied to correct the errors. On Strait Island, only two of the six identified stations could be held. The others appeared to be in error due to trouble with stadia distances.

One good example of identification difficulties was at BOULDER, 1915. Sutstitute Point "A" was used because it was the only point which seemed to agree with distances, sketch, and photograph. At Sub. Pt. "B", the position seems to check the easterly point of large rock - instead of the westerly point, as described. At Sub. Pt. "C" the position falls in the water indicating a distance error, probably due to stadia error. The approximate location of the station could be determined from the description for use in selecting the correctly identified sub. pt. Due to centers of several photographs falling water areas, a rigid plot to eliminate the errors in identification could not be obtained and Sub. Pt. "A" was used to control the plot.

Another example of control misidentification was at POM, 1929. The rock selected was actually in deep shadow and not visible so a wrong rock was identified on photograph 55-W-9589 which was taken in late afternoon. Photograph 55-W-9700 taken in morning of next day also covers the area and, if used, no error in identification would have been made.

Another example is at ROSE, 1937. The distance between two substitute points is short. Sub. Pt. "A" is a boulder or beach at edge of shadow. Sub. Pt. "B" is a prominent, high outcrop. Both appear to be good positive points. The error may be in either Sub. Pt. "A", which could be in shadow or in position for Sub. Pt. "B" which is a long distance from the station and a small error in azimuth could account for the error. Sub. Pt. "A" was held in the radial plot, but the identification should be verified since it is the last station in the plot at the head of Port Beauclerc.

27. POSITION ERROR

The published position for triangulation station SEC, 1929 places it in the water, in Port Beauclerc, off Edwards Island. The description of the station on page 17 of cahier Alaska No. 41, places the station "about 2 miles south of Boulder Point on the west shore of Summer Strait. The approximate position for this station should be 56° 17.4 N and 133° 51.1 W. Also see Recovery Note, Form 526.

The published position for triangulation station PEAK 16, 1922 places it in forty-five (45) fathoms of water, in Chatham Strait, east of Cape Decision.

Respectfully submitted


10 June 1960

Leroy A. Senasack Carto. (Photo.)

LIST OF NUMBERED CONTROL STATIONS PH - 5702

			*•	•
	1.	AGO, 1954	27. POM, 1929	53. RUTH, 1937
	2.	CON,1927 ·	28. TURN, 1929	54. VICK, 1937
	3.	HOW, 1954	29. BOULDER, 1915	55. НОРЕ, 1936
-	4.	GAL, 1954	30. TRUS, 1937	56. BUSH, 1936
	5•	DELRI, 1915	31. EDNA, 1937.	57. DUB, 1936
	6.	BIB, 1954	32. WEAK, 1937	58. MILT, 1937
_	7•	REEF 2, 1915	33. FLOR, 1937	59. MACK, 1937
-	8.	FOX, 1929	34. GOOD, 1937	60. HOLM, 1937
	9.	NER, 1929	35. PEGG, 1937	61. CLEVE, 1886-1922
	10,	THAT, 1927	36. GENE, 1937	62. ARTHUR, 1936
	11.	BAY, 1929	37. CORK, 1937	63. LEMON, 1936
	12.	FAG, 1929	38. WESS, 1937	64. NORTH, 1936
	13.	RUT, 1929	39. MON, 1929	65. LEMON POINT ROCK LIGHT, 1958
	14.	PAR, 1929	40. SW, 1929	66. STAR, 1936
	15.	DAL, 1929	41. BEAUCLERC 2 (LIGHT), 1922	67. AFFLECK, 1936
	16.	UP, 1929	42. BEAR, 1936	68. JUNE, 1937
*	17.	TWIN, 1926	43. ВІТЕ, 1936	69. BETS, 1937
*	18.	BARE, 1926	Щ. ALECK, 1936	70. ALBANS, 1886
*	19.	ARM, 1926	45. BUDD, 1937	71. MAC, 1899
*	50.	MID, 1926	46. номе, 1937	72. MAC, 1936
*	21.	ROCK, 1926	47. PEN, 1936	73. SHORE, 1923
*	22.	WON, 1925	48. ENTER, 1936	74. MIDDY, 1936
*	23.	G O 2, 1958	49. німо, 1936	75, ZAG, 1923
*	24.	TRI, 1926	50. ADEN, 1937	76. CAPE DECISION LIGHT, 1936
	25.	LAST, 1926	51. SOW, 1929	77. SPANISH ISLAND LIGHT, 1936
	26∙	ROSE, 1937	52. PIN, 1915	78. WAY, 1936

^{*} On nine lens photo's only

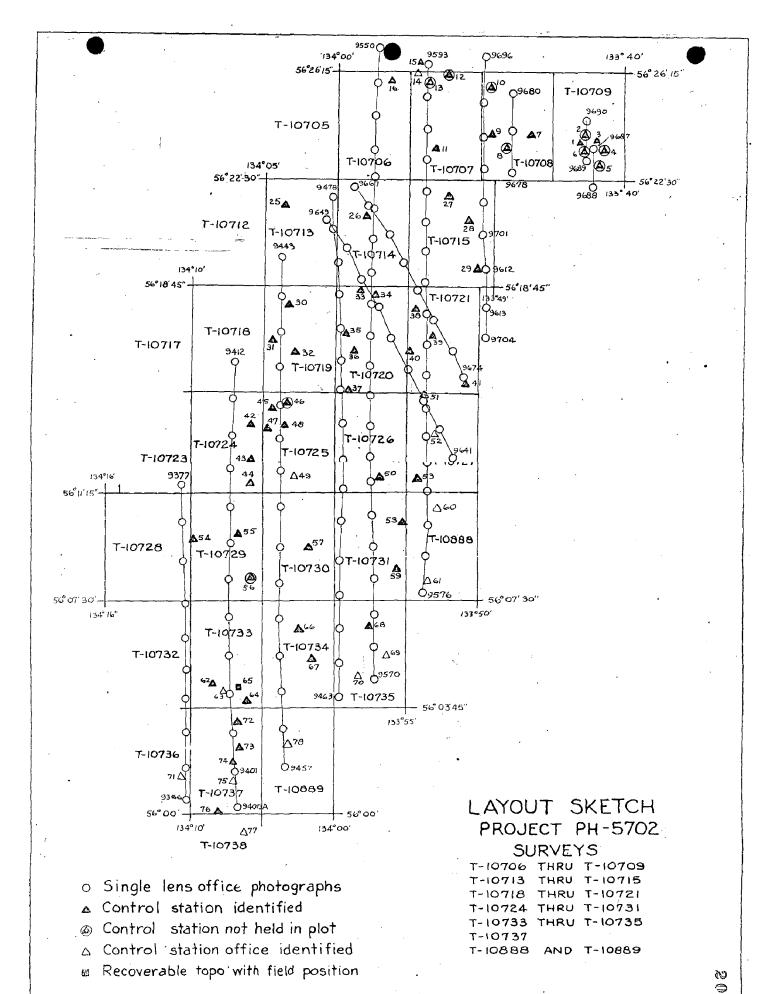

FORM **164** (4-23-54)

U.S. DEPARTMENT OF COMMERCE

DESCRIPTIVE REPORT

PH-5702

CONTROL RECORD

COAST AND GEODETIC SURVEY

1:10,000

FROM GRID OR PROJECTION LINE FROM GRID OR PROJECTION LINE IN METERS COMM- DC- 57845 2 1 (BACK) FORWARD 11/4/59 SCALE FACTOR (BACK) 1512.6 (343.2) 256.6 (778.0) 1292.5 (563.3 1076.4 (779.4) 1400.0 (455.8) N.A. 1927 - DATUM 1715.6 (140.2 858.4 (175.4) 661.0 (374.1) 668.0 (365.2) (101.8)FORWARD 932.0 DATUM SCALE OF MAP *** OR PROJECTION LINE IN METERS DISTANCE FROM GRID IN FEET. (BACK) FORWARD 26° 11, 48.904" 56° 10' 41.789" 133° 52' 38.313" 521 49.818" 45.263" 54.094" 560 141 55.466" 133° 53" 38.790" 131 34.800" LONGITUDE OR x-COORDINATE LATITUDE OR # COORDINATE 13 25 56° 133° 260 1330 DATUM N.A. • = = 5 COMPUTED BY. M . CUNNINGHAM SOURCE OF G-3581 Pg-763 G-503 Pg-538 Pg.763 G-3581 Pg.538 Pg. 214 609-5 G-503 (INDEX) 10727 1929 HOLM, 1937 MAP T. RUTH, 1937 1929 PIN, 1915 STATION ROCK, SOW,

DATE

B.WILSON

CHECKED BY:

10/50/29

DATE

FORM **164** (4-23-54)

DESCRIPTIVE REPORT U.S. DEPARTMENT OF COMMERCE

CONTROL RECORD

COAST AND GEODETIC SURVEY

PROM GRID OR PROJECTION LINE FROM GRID OR PROJECTION LINE IN METERS COMM- DC- 57843 2 2 (BACK) FORWARD 11/3/59 SCALE FACTOR (BACK) N.A. 1927 - DATUM DATE.... FORWARD DATUM SCALE OF MAP 1:10,000 CHECKED BY B.WILSON OR PROJECTION LINE IN METERS DISTANCE FROM GRID IN FEET. (BACK) FORWARD LONGITUDE OR x-COORDINATE LATITUDE OR U-COORDINATE PROJECT NO. PH-5702 568,001,30 6,231,942.70 568,529.29 6,234,112,65 6,228,323.08 6,228,311.80 568,011,78 6,228,319.75 6,231,620.43 569,412.72 6,234,100.63 568,527.24 567,999.74 569,333.83 10/6/29 DATE N.A. 1927 DATUM = = z = = Ħ COMPUTED BY. M. CUNNINGHAM MAP T. 10727 Comp. Comp. SOURCE OF INFORMATION Page II Comb. Раде Раде 11 Page (INDEX) H σ SUB PT. "A" RUTH, 1937 SUB Pr. "B" RUTH, 1937 SUB PT. "A" SOW, 1929 RUTH, 1937 ROCK, 1929 STATION 1915 SOW, 1929 PIN,

COMPILATION REPORT

T-10726 and T-10727

31. DELINEATION:

These manuscripts were delineated by the graphic method.

No field edit report by the 1961 field party was available at the compilation office.

32. CONTROL:

The identification, density and placement of horizontal control was adequate.

33. SUPPLEMENTAL DATA:

Hydrographic Survey No. 6358, Louise Cove and Approaches, Scale 1:10,000, dated September 1938. This survey was of value as an aid in interpreting shoreline, rocks and foul areas on the photographs.

34. CONTOURS AND DRAINAGE:

Contours: Not applicable

Drainage: No comment

35. SHORELINE AND ALONGSHORE DETAILS:

There was no shoreline field inspection, except in the immediate vicinity of identified control.

All delineation was based on office interpretation and was corrected or verified by field edit.

Interpretation of the mean high water line was difficult in some areas due to overhanging trees and shadows. Where this occurred, the shoreline was delineated with a dashed line. Field edit verified and/or corrected some of this approximate shoreline and some remains on the manuscript.

The low water line, offshore limits of ledge, foul areas and rocks awash were delineated by office interpretation of the 1:20,000 scale nine-lens photos which were enlarged to map scale by use of the vertical projector. Field edit also verified and/or corrected these features.

36. OFFSHORE DETAILS:

No comment

37. LANDMARKS AND AIDS:

None

38. CONTROL FOR FUTURE SURVEYS:

Hone

39. JUNCTIONS:

Junction between these two surveys has been made and is in agreement.

Junctions have also been made and are in agreement as follows: To the north with T-10721, to the south with T-10731 and T-10888, to the west there were no details to be joined with T-10715, and to the east is an all water area.

40. HORIZONTAL AND VERTICAL ACCURACY:

No comment

41 thru 45. Not used

46. COMPARISON WITH EXISTING MAPS:

U. S. G. S. PETERSBURG, ALASKA-CANADA, Reconnaissance Topographic Series, Scale 1:250,000, dated 1952.

47. COMPARISON WITH NAUTICAL CHARTS:

Chart 8201, scale 1:217,828, 10th edition, dated 17 July 1961.

Items to be applied to neutical charts immediately:

None

Items to be carried forward:

None

Respectfully submitted:

R. Glaser Cartographer-Photo 14 December 1961

October 26, 1971

GEOGRAPHIC NAMES FINAL NAME SHEET

PH-5702 (Alaska)

T-10727

Kuiu Island

Point Amelius

Summer Strait

Approved by:

A. Noseph Wraight/ Chief Geographer

Prepared by:

Frank W. Pickett Cartographic Technician

NOTES FOR THE HYDROGRAPHER

SUMNER STRAIT
(Cape Decision to Foint Amelius)
Surveys T-10726, T-10727, T-10731,
T-10734, T-10735, T-10737,
T-10888 and T-10889

These surveys were delineated by office interpretation of photographs taken near high water. Ledge areas, approximate low water lines, and rocks awash at low tide were delineated from nine-lens photography, scale 1:20,000, taken at a low stage of tide (about 2' above MLIN), using a reflecting projector to correct for scale difference.

A dashed line was used to indicate extent of kelp and foul areas visible on single lens photographs.

The MHW line was shown with a dashed line in a few areas in deep shadows.

Verify, or indicate correction to, office interpreted shoreline.

Verify, or correct, extent of ledge areas and character of foreshore. (Shown as gravel, ledge, etc.)

Inspect and indicate extent of bluffs of importance for charting.

Inspect and give elevations of those offshore rocks and rocks awash whose elevations are of importance to navigation.

Reidentify station BUSH, 1936 (survey T-10729) photographs 55-W-9405 and 9406). This station is critical for photogrammetric plot. Previous identification is in error but the error cannot be definitely determined in the office. (This survey is Affleck Canal and has not been compiled. It is northwest of T-10734, at the mouth of Kell Bay.)

COMM- DC 34529

Office Copy

FORM 182 (6-12-56) U.S. DEPARTMENT OF COMMERCE COAST AND GEODETIC SURVEY



PHOTOGRAMMETRIC OFFICE REVIEW

T. 10726, T-10727

		/
	CONTROL STATIONS	4a. Classification labet.
5. Horizontal control st	ations of third-order or higher accuracy	6. Recoverable horizontal stations of I
	cy (topographic stations)7. Photo hydro s	
9 Plotting of sextant fi	xes	11 Detail points
or totally or totallite in		
	ALONGSHORE AREAS	•
	(Nautical Chart Data)	
12. Shoreline	.13. Low-water line 14. Rocks, shoals, etc	15. Bridges16. /
	17. Landmarks18. Other alongshore phys	
shore cultural features.		
	-	
	PHYSICAL FEATURES	
20. Water features	21. Natural ground cover 22. Plane	itable contours <u> </u>
	24. Contours in general 25. Spo	
features	,	
	•	v.
	CULTURAL FEATURES	
27. Roads 28	3. Buildings 29. Railroads 30. (Other cultural features
	BOUNDARIES	
31. Boundary lines	32. Public land lines	
	MISCELLANEOUS	
	34. Junctions35. Legibility of the	
overlay 37. D	escriptive Report 38. Field inspection pho	otographs 39. Forms
40. <u>/ / / / / / / / / / / / / / / / / / /</u>	Reviewer	Supervisor, Review Section or Unit
		•
41. Remarks (see attac	ched sheet)	
		·
	D COMPLETION ADDITIONS AND CORRECTIONS 1	
42 Additions and corre	ections furnished by the field completion survey hav	e been applied to the manuscript.
	niete avcent se noted under item 49	
	plete except as noted under item 43.	

FIELD EDIT REPORT

T-10727

No Field Edit Report was available at the time of Final Review and none is bound with this Descriptive Report.

REVIEW REPORT T-10727

SHORELINE

January 27, 1972

61. GENERAL STATEMENT:

See Summary on page 6 of this Descriptive Report.

An ozalid comparison print, pages 29 through 32, showing differences noted in Items 62 and 64 is bound with the original of this report.

62. COMPARISON WITH REGISTERED TOPOGRAPHIC SURVEYS:

A comparison was made with Survey 6664, scale 1:20,000, dated September 1938 and with Survey 6638, scale 1:10,000, dated 1937 and 1938. Differences between these surveys and T-10727 are shown in blue on the comparison print.

63. COMPARISON WITH MAPS OFHOTHER AGENCIES:

A visual comparison was made with U.S.G.S. Quadrangle PETERSBURG (A-6), ALASKA, scale 1:63,360, dated 1948. No significant differences between this map and T-10727 were noted.

64. COMPARISON WITH CONTEMPORARY HYDROGRAPHIC SURVEYS:

A comparison north of latitude 56° 12.7' was made with a copy of the smooth sheet for Survey H-8653, scale 1:10,000, dated 1961. No significant difference between this survey and T-10727 was noted.

Comparison south of latitude 56° 12.7° was made with Survey H-6358, scale 1:20,000, dated September 1938. Differences between this survey and T-10727 are the same as differences between T-6638 and T-10727, and are therefore shown in blue on the comparison print.

65. COMPARISON WITH NAUTICAL CHARTS:

A visual comparison was made with Chart 8201, scale 1:217,828, 16th edition, dated 7 Nov. 1970. No significant difference between this chart and T-10727 was noted.

66. ADEQUACY OF RESULTS AND FUTURE SURVEYS:

It is believed that this survey is sufficiently accurate for photo-hydro support and nautical chart construction purposes.

Please see Photogrammetric Plot Report, Scale 1:20,000, dated June 9, 1960 and Photogrammetric Plot Report, Scale 1:10,000, dated June 10, 1960, neither of which state whether the accuracy of these radial plots meets the National Standards of Map Accuracy.

Reviewed by:

Charles H.Bishop

Charles H. Bishop Cartographer 27 **J**anuary 1972

Approved for forwarding:

Melvin J. Mmbach, CDR, NOAA

Chief, Photogrammetry Division, AMC

Approved:

Alfred C. Holmes, RADM, NOAA


Director, Atlantic Marine Center


Approved:

Chief, Photogrammetric Branch

Coastal Mapping Division

		29
0		
	COMPARISON I	
¥ 00	Blue = T-	-6664
X=568,000M	/33° 5 4′	/33° 53
		T-10721 56°151
	Sub Pt A sow	1929
	detail pt 20 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	
	55W-9582	
	Т	14'30"
		INCOMPLE
0		OMP OMP
1	133° 54'	The state of the s

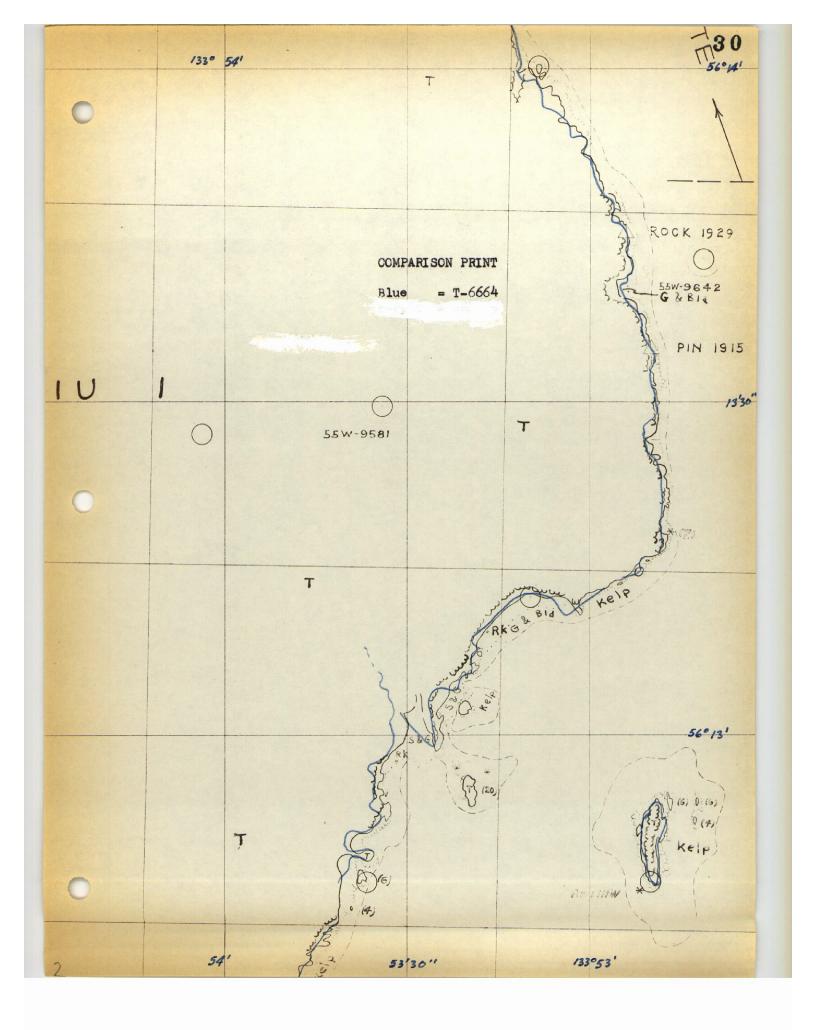

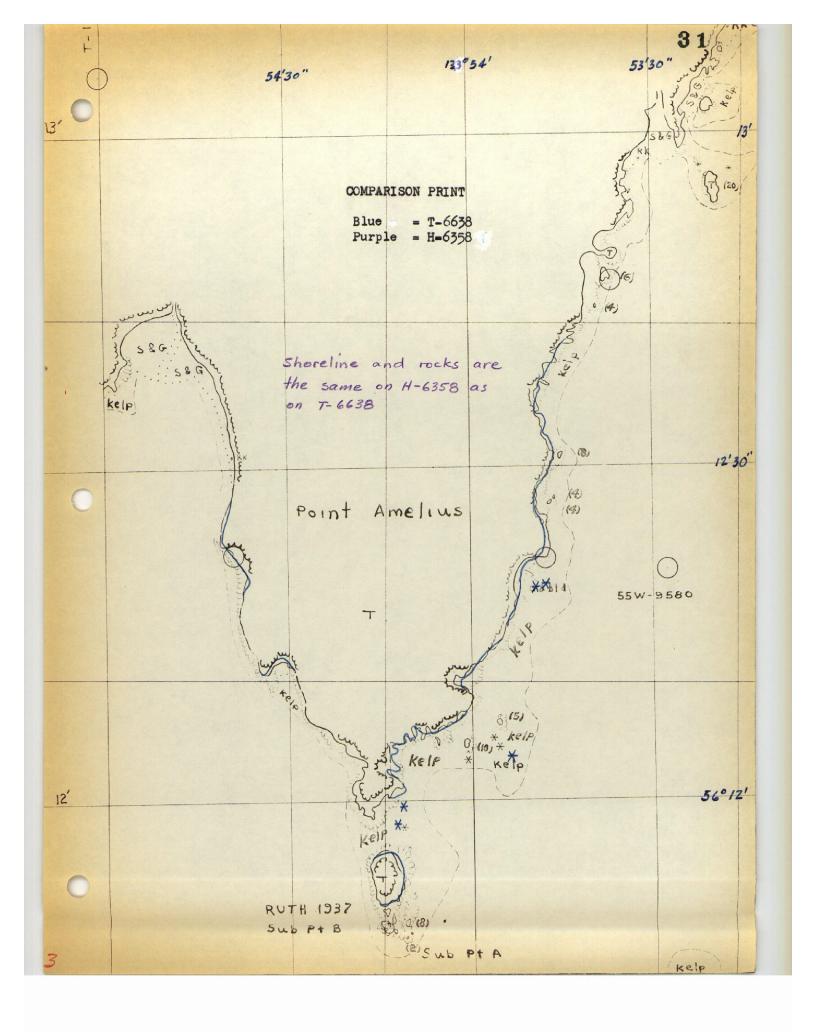

6)(5) * ke/p 53	'30"	/33°	53' 52'30"	32
Kelp				56°/2'
A (*)kelp	K X P	AWMWWX XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX	Kelp X	
				11'30"
55W-9579	***	elp The	*+	56°/1'/5"
		/33° 5	T-10888	5
			Date of Photography Sept. 1955, and May 1958 Date of Field Inspection Oct. 1958 Date of Field Edit Aug. 1961 Date of Final Compilation Dec. 1961 Date of Final Review Jan. 1972 COMPARISON PRINT	
4		e and roc same on h		